



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
22.05.2002 Bulletin 2002/21

(51) Int Cl.7: **H04L 12/28, H04L 12/56**

(21) Application number: **01122651.1**

(22) Date of filing: **27.09.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **16.11.2000 US 714803**

(71) Applicant: **SYMBOL TECHNOLOGIES, INC.**
Holtsville, New York 11742-1300 (US)

(72) Inventors:
• **Shellhammer, Stephen J.**
Lake Grove, NY 11755 (US)
• **Sharony, Jacob**
Dix Hills, NY 11746 (US)
• **Biuso, Anthony D.**
South Setauket, NY 11720 (US)

• **Connolly, Sean A.**
Stony Brook, NY 11790 (US)
• **Sackett, William**
Rocky Point, NY 11778 (US)
• **Cabana, Joseph**
Centereach, NY 11720 (US)
• **Tilley, Patrick**
Coram, NY 11727 (US)
• **Beach, Robert**
Los Altos, CA 94204 (US)

(74) Representative:
Geyer, Ulrich F., Dr. Dipl.-Phys. et al
WAGNER & GEYER,
Patentanwälte,
Gewürzmühlstrasse 5
80538 München (DE)

(54) **Coexistence techniques in wireless networks**

(57) Techniques are provided for frequency coordination among two different wireless network protocols, such as the IEEE 802.11 and Bluetooth protocols, operating in proximity with one another. Coordination is accomplished by the use of a first radio transceiver operating in accordance with a first communication protocol (which may be the 802.11 protocol) and using a frequency band (which may be the 2.4 GHz band), a base station connected to a wired network and operating in accordance with the first communication protocol, a second radio transceiver operating in accordance with a second communication protocol (which may be the Bluetooth protocol) and using the frequency band, and a coordinator associated with the base station for, in turn, activating the first radio transceiver, deactivating the first radio transceiver, activating the second radio transceiver, and deactivating the second radio transceiver.

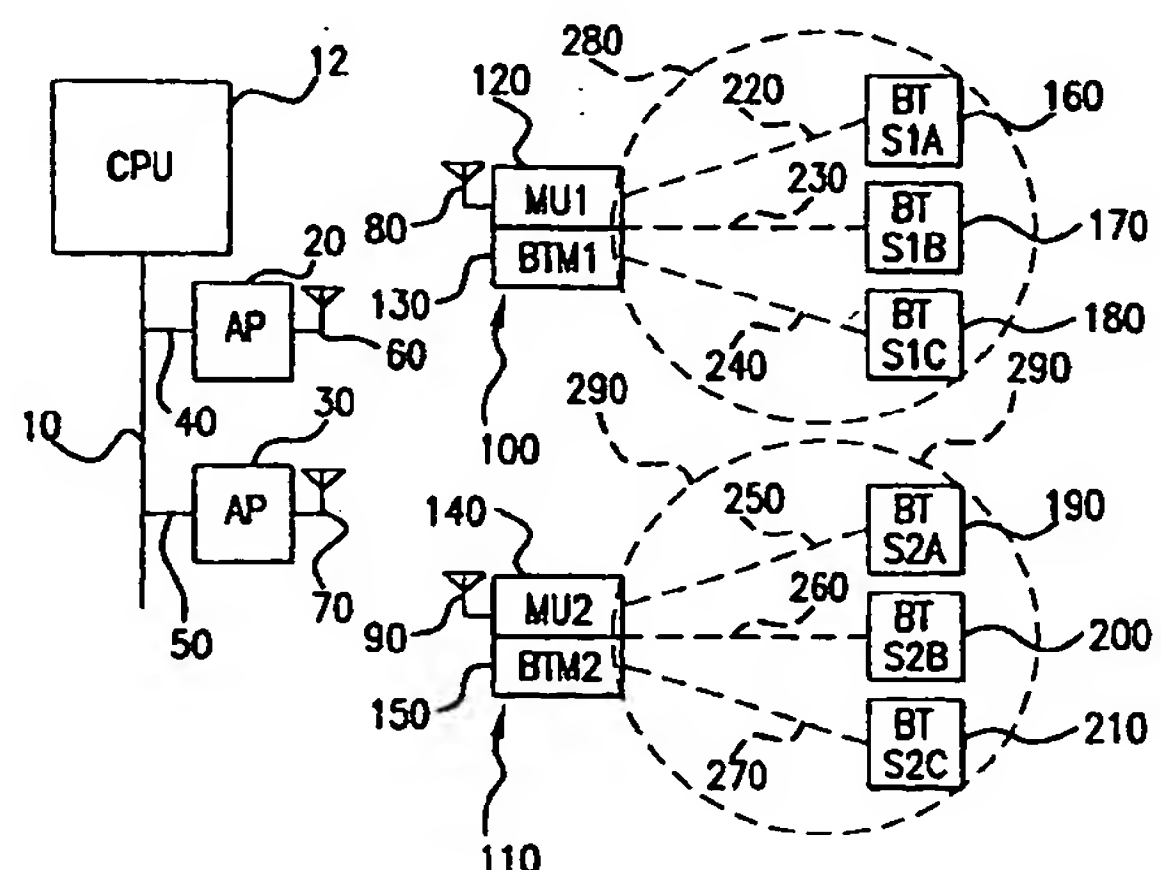


FIG. 1

Description

BACKGROUND OF THE INVENTION

[0001] This application claims the benefit of provisional applications Serial No. 60/175,262, filed January 10, 2000 and Serial No. 60/196,979, filed April 13, 2000. This invention relates to wireless data communications networks, and in particular to arrangements for ensuring coexistence between wireless networks that share the same frequency band with different operating protocols.

[0002] Wireless devices communicate with one another using agreed-upon protocols that are transmitted in predefined frequency bands. Often, devices using one or more wireless protocols may operate by transmission within the same frequency band. It is therefore necessary to develop coordination techniques in order for devices using one or more wireless protocols to efficiently operate in the same band of frequencies at the same time.

[0003] For example, the assignee of the present invention supplies wireless data communications systems known as the Spectrum 24® System that follows the communications protocol of IEEE 802.11 Standard (802.11), which is hereby incorporated by reference. In the system as implemented, mobile units (MUs) are in data communication with a central computer through one or more access points (APs). The APs may communicate with a computer directly or over an Ethernet wired network. Each of the MUs associates itself with one of the APs. As defined in 802.11, this communications protocol uses the 2.4 GHz ISM frequency band.

[0004] As currently designed, 802.11 devices may use several predefined methods for transmission within the 2.4 GHz band to perform as a wireless local area network. One method is to use a frequency hopping spread spectrum (FHSS) mechanism wherein data is transmitted for a certain period of time in a particular channel and, following a pseudorandom sequence, continues transmission at a different channel for the same predetermined length of time. As currently designed, 802.11 devices operate at a frequency hopping rate of 10 hops/second. Another method is to use a direct sequence spread spectrum (DSSS) mechanism wherein the data is transmitted in a predetermined frequency channel and is multiplied by a pseudorandom chipping sequence during transmission.

[0005] As all 802.11 devices use the same ISM frequency band, interference among these devices is minimized by use of a Carrier Sense Multiple Access/Collision Avoidance (CSMA/CA) protocol. Under CSMA/CA, an 802.11 device listens for another's devices transmission prior to initiating its own transmission. If no other transmission is detected, the device transmits its information and waits for an acknowledgment (ACK) from the receiving device. If no acknowledgment of receipt is received after a pre-determined time interval, the device will retransmit after waiting for a randomly chosen inter-

val of time. Thus, if two or more devices began transmitting coincidentally at the same time and the resulting interference blocks all of the transmissions, each device will wait a random amount of time to attempt a retransmission. This allows the devices to transmit at different times.

[0006] Another example of a wireless specification that also uses the 2.4 GHz ISM frequency band is Bluetooth™, which is designed for communication among devices within a short range transmitting at a lower power level. The Bluetooth specification is available at www.bluetooth.com. As currently designed, Bluetooth operates using a frequency hopping spread spectrum mechanism at a rate of 1600 hops/second. Bluetooth uses a master/slave system of communication. One example of a Bluetooth network may be a mobile device attached to the user's belt that communicates with a cordless scanner for reading bar codes and worn by the user as a ring. In this case, the mobile device would operate as the master and the cordless ring scanner would operate as the slave. In this system for data transmission, the master and slave only communicate at predefined intervals. At the first interval, the master may communicate to a first slave device, which may only respond during the second interval. At the third interval, a master may communicate to a second slave device, which may only respond during a fourth interval. By using this system, it is ensured that only one device within a particular Bluetooth "piconet" is transmitting at any particular time. Thus, interference is minimized.

[0007] Additionally, it is desirable for one Bluetooth piconet to operate in close proximity with another, separate Bluetooth piconet. Because there are 79 different frequency channels used by Bluetooth, different Bluetooth networks are unlikely to be operating on the same frequency at the same time. Interference between the separate Bluetooth piconets is thus minimized. This allows, for example, multiple individuals working in close proximity with one another to each have his or her own mobile unit along with a cordless ring scanner.

[0008] Along with the need to operate multiple networks of the same protocol in close proximity, there is also a recognized need in the art to coordinate the transmissions of devices operating under different protocols that use the same frequency band. For example, it may be desirable to use a cordless ring scanner that communicates with belt-mounted terminal using the Bluetooth protocol while the same belt mounted terminal communicates with an access point using the 802.11 protocol. For example, once the user scans a bar code using the cordless ring scanner, the bar code information may be sent to the belt-mounted terminal. That bar code information may then be transmitted to the 802.11 AP. Then an acknowledgment, and possibly a message, may need to be sent from the AP back to the belt-mounted terminal. The terminal may also need to communicate with other Bluetooth enabled peripherals like a printer or a headset. Although communication protocols

such as 802.11 and Bluetooth are designed to ensure that devices using the same protocol may operate in the same frequency band with a minimum of interference, there has heretofore been no method of coordination for the use of these wireless devices in the same frequency operating under different communication protocols.

[0009] It is additionally desirable to provide voice service using the Bluetooth communications protocol, for example, between a belt-mounted terminal and a headset worn by the user. Bluetooth supports voice communications using Synchronous Connection Oriented (SCO) voice packets which are transmitted every 3.75 ms. The requirement for such frequent Bluetooth packet transmission makes it difficult to coordinate voice transmission using the Bluetooth SCO packets with 802.11 communications.

[0010] It is therefore an object of this invention to utilize coordination techniques to ensure that, for example, both Bluetooth and 802.11 enabled devices, may operate robustly in the same frequency band at the same time.

SUMMARY OF THE INVENTION

[0011] An embodiment of the present invention includes a first radio transceiver operating in accordance with a first communication protocol (which may be the 802.11 protocol) and using a frequency band (which may be the 2.4 GHz ISM band), a base station operating in accordance with the first communication protocol, a second radio transceiver operating in accordance with a second communication protocol (which may be the Bluetooth protocol) and using the frequency band, and a coordinator associated with the base station for, in turn, activating the first radio transceiver, deactivating the first radio transceiver, activating the second radio transceiver, and deactivating the second radio transceiver.

[0012] The first radio transceiver and the second radio transceiver may be mounted together in a housing, which may be suitable for wearing on a belt or a laptop computer or a PDA. One or more slave devices may be associated with the second transceiver and operate in accordance with the second communication protocol. The slave devices may include a scanner, worn on a user's finger and capable of transmitting bar code information to the second transceiver, a printer, or a personal data managing device.

[0013] In one arrangement wherein the first and second transceivers are mounted together in a housing, they may include orthogonally polarized antennas. In another arrangement a Bluetooth protocol transceiver transmits at power level of about 0 dBm. In still another arrangement, two or more sub bands within the frequency band are provided and the 802.11 protocol transceiver uses one of the two or more sub-bands and the Bluetooth protocol transceiver uses another of the two or more sub-bands. In still another arrangement in the sec-

ond radio transceiver is equipped with a look-ahead function for determining whether two or more sub-bands are being used by the first radio transceiver that will also be used by the second transceiver. In still another arrangement, a coordinator is associated with the first radio transceiver for deactivating the second radio transceiver while the first radio transceiver is in use.

[0014] According to the invention, there is provided a method for operating a portable data communications device using first and second wireless data communications protocol. The data communications device is operated in a power saving mode of the first communication protocol, whereby the device has active time periods for transmitting and receiving data communications signals using the first communications protocol and dormant time periods during which the device neither transmits nor receives data communications signals using the first protocol. The data communications device is operated as a master device according to the second communications protocol whereby the data communication device controls operation of slave devices communicating therewith. The operation according to the second data communications protocol is controlled to operate only during the dormant time periods of the first protocols.

[0015] In one embodiment, a signal indicating that the active time period will commence following a predetermined time interval is provided to terminate operation according to the second data communication protocol during the predetermined time interval. The first wireless data communications protocol may be the 802.11 protocol. The second wireless communication protocol may be Bluetooth.

[0016] In another aspect of the invention, there is provided a method for operating a wireless data communications system having an access point and at least one mobile unit associated with said access point using a first wireless protocol (which may be 802.11), wherein said mobile unit is arranged to conduct wireless data communications with other units using a second wireless protocol (which may be Bluetooth). Periodic beacon signals are transmitted from the access point according to the first wireless protocol. Global clear to send signals are transmitted from the access point according to the first wireless protocol, whereby the global clear to send signals prevent mobile units from transmitting signals using the first data communications protocol during an allocated time interval within the beacon signal period. The access point is controlled to avoid transmissions during the allocated time interval, and the mobile unit is operated in response to the global clear to send signal to conduct wireless communications acting as a master unit using the second wireless protocol during the allocated time interval.

[0017] In one embodiment, the beacon signal period is divided into three time intervals, wherein the access point conducts power saving mode data communications during a first time interval, wherein the access point conducts data communications using the second com-

communications protocol during the second time interval and wherein the access point conducts data communications using the first wireless protocol during a third time interval. The first time interval may immediately following the beacon signal. In another embodiment, the first time interval may not be utilized.

[0018] In accordance with another aspect of the invention, there is provided a method of operating a data communications system using a master-slave protocol (such as Bluetooth), wherein a master transceiver transmits to slave units during first even time slots and wherein slave units transmit to the master unit during odd time slots, and wherein the transmissions follow a predetermined frequency hop pattern at a hop rate corresponding to the time slots. The master unit is operated during a first time period of each time slot to detect interfering signals at a frequency corresponding to the following time slot. Transmission by the master transceiver is inhibited during even time slots if interfering signals have been detected during either of the current or previous time slots.

[0019] In a preferred practice, the operating step includes tuning the master unit to receive signals corresponding to the frequency allocated to the next following time slot; detecting the strength of signals received and retuning the master unit to send or receive signals corresponding to the frequency allocated to the current time slot.

[0020] In another aspect of the invention, there is provided a method for providing voice communications in a wireless data communications system having a mobile unit arranged to communicate with an access point using a first data communications protocol (such as 802.11) and arranged to communicate with other devices using a second data communications protocol (such as Bluetooth). Data corresponding to the voice communication is communicated between the access point and the mobile unit using the first data communications protocol. The data corresponding to the voice communications is communicated between the mobile unit and a portable device using the second data communication protocol. The communication is arranged at time intervals which avoid interference with the communicating using the first data communications protocol. Voice signals are converted to data corresponding to the voice signals and data signals corresponding to voice signal are converted into voice signals in the portable device.

[0021] In a preferred arrangement, the data corresponding to voice signals comprises compressed voice signal data. The communication between the mobile unit and the portable device preferably uses a Bluetooth ACL link.

[0022] According to a further aspect of the invention, there is provided a method for operating a mobile unit arranged to communicate using first and second data communication protocols operating in the same frequency band (such as 802.11 and Bluetooth) wherein the mobile unit associates with an access point and re-

ceives therefrom beacon signals demarcating time intervals according to the first communications protocol. Signals are received from the access point (such as CTS signals) designating a portion of one of the time intervals during which mobile units associated with the access point refrain from transmissions using said first data communications protocol. The mobile unit is operated as a master unit using the second data communications protocol to communicate with slave units during the designated portion of the time interval.

[0023] According to a further aspect of the invention, there is provided a method for operating a wireless data communications network having at least one access point and at least one mobile unit, including a mobile unit arranged to communicate with the access point using a first wireless data communication protocol (such as 802.11) in a first frequency band and to communicate with other devices using a second wireless data communication protocol (such as Bluetooth) in the first frequency band. Signals (such as CTS) as sent from the access point in the first communications protocol, which designate a time period wherein mobile units associated with the access point refrain from transmitting using the first data communications protocol. The mobile units operate as a master unit to conduct wireless data communications with the other devices operating as slave units using the second data communications protocol during the designated time period.

[0024] According to still another aspect of the invention, a method is provided for operating a mobile unit arranged to communicate using first and second data communications protocols operating in the same frequency band (such as 802.11 and Bluetooth), wherein the mobile unit associates with an access point. The mobile unit receives first and second control signals using the first data communications protocol. The mobile units are operated in response to the first control signals to act as a master unit and conduct data communications with slave units using the second data communications protocol. Communications by the mobile unit using the second data communications protocol is discontinued in response to the second control signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025]

Figure 1 is a block diagram of a wireless communications system using 802.11 and Bluetooth devices. Figure 2 is a block diagram of a wireless communications system using 802.11 and Bluetooth devices at the same time along with a connect button switch and connected indicators.

Figure 3 is a schematic diagram of an embodiment of the present invention illustrating a coordinated time line between the operation of 802.11 and Bluetooth devices.

Figure 4 is a schematic diagram of an embodiment

of the present invention illustrating another coordinated time line between the operation of 802.11 and Bluetooth devices.

Figure 5 is a diagram showing a modified Bluetooth operating method for avoiding interference.

Figure 6 is a drawing showing one example of orthogonally polarized antennas.

Figure 7 is a drawing of a wireless headset arranged for voice communications.

Figure 8 is a block diagram of the headset of Figure 7.

DESCRIPTION OF THE INVENTION

Turning to Figure 1, shown are a plurality of base stations or Access Points (APs) 20, 30 that are physically connected 40, 50 to a wired network 10. While a wired network with multiple access points connected to a CPU 12 is a typical installation, the system may use a single computer and single AP. Each AP contains apparatus 60, 70 for the transmission and reception of radio frequency (RF) signals under the 802.11 protocol. Also using the 802.11 protocol, a plurality of radio transceivers or mobile units (MUs) 120, 140 communicate using apparatus 80, 90 for the transmission and reception of RF signals. Each MU 120, 140 may also be associated with a radio transceiver which is a Bluetooth Master (BTM) device 130, 150, which together make up a dual mode devices 100, 110. The association between the MU and BTM may be, for example, by way of being physically housed in the same unit. An example of a dual mode device 100, 110 may be portable terminal worn on a belt.

Each BTM 130, 150 communicates with one or more Bluetooth Slave (BTS) devices 160, 170, 180, 190, 200, 210 via the Bluetooth protocol. The Bluetooth protocol is established such that each BTS is uniquely associated with a BTM. Thus, as illustrated, BTS1A 160, BTS1B 170, and BTS1C 180 communicate using RF signals 220, 230, 240 only with BTM1 130. This forms a piconet 280. Correspondingly, BTS2A 190, BTS2B 200, and BTS2C 210 communicate using RF signals 250, 260, 270 with BTM2 150. This forms a piconet 290. An example of a BTS may be a cordless ring scanner, a printer, or personal data managing device.

With no coordination, there will be times when the BTM 130, 150 and the associated MU 120, 140 attempt to operate at the exact same time. Since the two devices operate in the same 2.4 GHz ISM frequency band the BTM 130, 150 and the MU 120, 140 may severely interfere with one another, especially if they are housed in a dual mode device 100, 110. Therefore, there is a need for coordination between the two devices. One such coordination scheme is primarily based on time multiplexing of the 802.11 and BT radios, which is especially suitable for a controlled environment (e.g., the 802.11 and BT radios are housed in the same terminal or dual mode device). In one embodiment, the Bluetooth

systems are enabled or disabled according to a global/central signal from the 802.11 AP as described herein. The central signal may also be coordinated among the two devices without coordinating with the AP.

In a further embodiment, the dual mode devices 100, 110 may be designed such that the 802.11 antennas 80, 90 have orthogonal polarization with respect to the Bluetooth antennas used to generate RF signals 220, 230, 240, 250, 260, 270. This technique may provide additional protection from 802.11 Bluetooth interference and does not require the need for centralized control.

Figure 6 shows one example of orthogonally polarized antennas that can be used to reduce interference. The antenna structure of Figure 6 includes a vertically polarized monopole antenna 502, which is connected to a transmitter/receiver by an unbalanced transmission line 510. The structure also includes a horizontally polarized dipole antenna having dipole arms 504, 506 which are connected to a transmitter/receiver by balanced transmission line 508. Those skilled in the art will recognize that many other orthogonal-polarized antenna configurations may be used.

In a further embodiment, the BTMs 130, 150 may be designed to transmit at a relatively low power level such as lower than 0 dBm. This technique may provide additional protection from 802.11 Bluetooth interference and may be used with other antenna or frequency coordination methods discussed herein.

In a further embodiment, the 802.11 APs 20, 30 and MUs 120, 140 may be designed to operate in one portion of the 2.4 GHz spectrum, while the BTMs 130, 150 and BTSs 160, 170, 180, 190, 200, 210 may be designed to operate in another portion of the 2.4 GHz spectrum.

In a further embodiment, the BTMs 130, 150 may be equipped with a look-ahead function to determine which frequencies within the 2.4 GHz band will be used for two or more future Bluetooth frequency hops to occur. If the BTM 130, 150 determines that one of the next two or more frequency hops will use the same frequency that the 802.11 system is using, the BTMs 130, 150 will blank their output, thus reducing the effect of the interference on the 802.11 transmissions. By using this method, interference between Bluetooth and 802.11 could be reduced or eliminated at the expense of dropping a couple of packets when channel overlap occurs. This approach may also be expanded to include the blanking of adjacent channels that may also interfere with the 802.11 transmissions.

Bluetooth uses a Frequency Hopping Spread Spectrum (FHSS) radio, which hops much faster than most IEEE 802.11 radios. Bluetooth sends a short packet as it dwells on a given frequency. Most IEEE 802.11 radios hop much slower and send much longer packets. Also there are versions of IEEE 802.11 WLANs that use Direct Sequence Spread Spectrum (DSSS) which do not hop and occupy a wide band.

[0035] As a result, during the transmission of an IEEE 802.11 packet the Bluetooth radio hops across many frequencies and potentially sends a packet on each frequency. These Bluetooth packets can interfere with the IEEE 802.11 packets and cause the IEEE 802.11 packet to be in error. The IEEE 802.11 packet needs to be re-transmitted, and once again may be destroyed by the signal from the Bluetooth radio.

[0036] This technique shown in Figure 5 can be used in any Bluetooth radio and in any device that will operate in an IEEE 802.11 WLAN environment. Since it detects devices radiating in the 2.4 GHz ISM band it could also be used to prevent interference with other devices in that band.

[0037] A Bluetooth network consists of up to eight Bluetooth devices operating in a piconet. The piconet has one master and up to seven slaves. All the Bluetooth devices in the piconet hop in unison, at a rate of 1600 hops/second. The time that the frequency hopper dwells on a given frequency is called the slot time. At this hop rate the slot time is 625 microseconds. Typically packets are completed within one slot time, however, it is also possible to have 3 and 5 slot packets. The master and the slaves take turns transmitting, with the master transmitting on even slots and the slaves transmitting on odd slots. See also Bluetooth Specification, version 1.0, December 1, 1999, which is hereby incorporated by reference in full.

[0038] There are two types of links between the master and each of the slave devices in a Bluetooth piconet. There is an asynchronous connection-less link (ACL) which is used to transfer data. There is also a synchronous connection oriented link (SCO) that is used to transfer voice data. The master in the piconet determines when data on an ACL link is transferred. Data is transferred when the master has data to send to a slave or the master wants to receive data from a slave.

[0039] Each Bluetooth device within a piconet frequency hops in unison, according to a pseudo random sequence. Figure 5 illustrates a device hopping along its sequence of frequencies: $f(1)$, $f(2)$, ... $f(n)$... The figure also shows how the 625-microsecond slot time includes a 220-microsecond period for tuning the frequency synthesizer in the radio to a new frequency and a 405-microsecond data transmission period.

[0040] As stated above during even slots $T(f)$ the master transmits to a slave and during odd slots $R(f)$ the slave transmits back to the master. The master can transmit on any even time slot. The slave can only transmit to the master in a time slot if the master sent the slave a packet in the previous time slot. If the master does not send data to any slave in slot n then no slave can transmit in slot $(n+1)$. The exception to this rule is for SCO link packets in which data is always transmitted in predefined periodic intervals. So for ACL links if the master does not transmit any data, the slaves do not send any data.

[0041] Currently the piconet master does not attempt

to determine if any other devices are using the spectrum before it transmits. As a result, if there is an IEEE 802.11 packet currently being transmitted the Bluetooth master will not bother to check to see if this other system is transmitting and will itself transmit at the same time, and possibly on the same frequency. As a result it will interfere with the IEEE 802.11 packet possibly causing the packet to be received incorrectly.

[0042] It is proposed to subdivide the 220 microsecond tuning time interval into several subintervals and to spend some of that time looking ahead into subsequent frequencies to see if there is any other devices transmitting in those channels. The reason to look ahead is that if the a master sends a message to slave #1 on frequency $f(n)$, then the master has cleared slave #1 to transmit during the next time slot on frequency $f(n+1)$. Therefore, the master needs to look ahead to the frequency that corresponds to the next slot. The 220 microsecond timing interval can be subdivided as follows. In the first 80 microseconds the frequency synthesizer in the master retunes to $f(n+1)$, then in the next 60 microseconds the master listens for any signal in that band. This can be done using a standard Receive Strength Signal Indicator (RSSI) in the radio. Then in the next 80 microseconds the frequency synthesizer then retunes the radio to $f(n)$. Figure 5 illustrates the new proposed time slot subdivision.

[0043] Just prior to receiving on frequency $f(n-1)$ the master checks to see that the frequency band at $f(n)$ is clear. Also, prior to transmitting on frequency $f(n)$ the master also makes sure that the frequency band $f(n)$ is clear. If frequency bands $f(n)$ and $f(n+1)$ are clear then the master will transmit on frequency band $f(n)$ and as a result allow the slave to transmit on frequency band $f(n+1)$, in the next time slot.

[0044] During a time slot R the master likewise checks the frequency band that it will use to transmit in the following time interval. If that time slot is occupied, it will not transmit.

[0045] Referring now to the schematic of Figure 3 in conjunction with the physical layout shown in Figure 1. There is shown another technique to coordinate transmissions. Every 802.11 beacon time period, T_{300} , may be divided into three time intervals: 802.11 communications in the power saving (PSP) mode - $t_{802.11PSP}$ 310, Bluetooth communications - t_{NAV} 320, and 802.11 communications in the active mode CAM - $t_{802.11CAM}$ 330. The duration of time intervals T , $t_{802.11PSP}$, t_{NAV} , and $t_{802.11CAM}$ depend on traffic characteristics and application needs (e.g., time critical services). At the beginning of each beacon period 300, AP 20 sends a beacon signal 350 to the 802.11 PSP MU's 120, 140 that wake up in this period (some PSP MU's may wake up in a different beacon). During this period the PSP MU's 120, 140 receive and transmit their packets according to the 802.11 protocol. Once all the PSP MU's 120, 140 receive their packets, the AP 20, may optionally send a global Clear to Send (CTS) signal 430 to shut down all

the 802.11 communications for a NAV (Network Allocation Vector) period. At this point the 802.11 MUs 120, 140 will enable their associated BTMs 130, 150 (which may be housed in the same dual mode devices 100, 110) so the piconets 280, 290 associated with these BTMs 130, 150 may begin BT communications 360, 370. After completion of the NAV period 320 the BTM 130, 150 radios are disabled and all BT communications is ceased. The rest of the time (until the next beacon 380) is dedicated for 802.11 Continuously Aware Mode (CAM) MU's (not shown) that operate according to the 802.11 protocol.

[0046] In a further embodiment, the $t_{802.11PSP}$ 310 time interval may be eliminated if the MUs do not operate in PSP mode. Here, the CTS signal 340 would trigger only t_{NAV} 320 and $t_{802.11CAM}$ 330 time intervals for every 802.11 beacon period, T 300.

[0047] In a further embodiment, the $t_{802.11CAM}$ 330 time interval may be eliminated if the MUs do not operate in CAM mode. Here, the CTS signal 340 would trigger only t_{NAV} 320 and $t_{802.11PSP}$ 310 time intervals for every 802.11 beacon period, T 300.

[0048] In a further embodiment, the Bluetooth systems are enabled or disabled according to a global/central signal from the dual mode devices 100, 110 instead of from an AP 20.

[0049] A further embodiment of the present invention may be demonstrated by referring to the schematic of Figure 4 in conjunction with the physical layout shown in Figure 1. In this approach there is no need for the 802.11 APs to coordinate between Bluetooth and 802.11 transmission. Instead, the Bluetooth network operates in the ordinary course until a 802.11 MU instructs one or all of the Bluetooth masters to stop transmitting messages to the Bluetooth slaves. When using Asynchronous Connectionless (ACS) packets, the Bluetooth master controls access to the medium for its piconet. Thus, if the masters stops transmitting the slaves stop as well. Once the 802.11 MU has completed its communication, the Bluetooth masters are allowed to resume communicating with the Bluetooth slaves. This technique is especially useful when all the 802.11 MUs are in PSP mode, because these devices are in suspended mode during most of the time.

[0050] As shown in Figure 4, when the MU 120 desires to initiate 802.11 communication, it sends a STOP signal 400 to the BTMs 130, 150. The MU 120 then communicates 450 using the 802.11 protocol with the AP 20. When the MU 120 is finished communicating for the period $t_{802.11}$ 470 and is ready to resume its power save mode, the MU 120 communicates a START signal 410 to the BTMs 130, 150. The BTMs 130, 150 may then proceed to communicate 430, 440 using the BT protocol with their respective BTSs 160, 170, 190, 200 during the period t_{BT} 480. When the MU 120 802.11 terminal "wakes up" to either send data or to listen for a 802.11 beacon from the AP 20, the MU 120 sends a STOP signal 420 to the BTMs 130, 150 to inform them that the MU

120 is taking over access to the medium. The MU 120 may warn the BTMs 130, 150 before it needs exclusive use of the medium, and this warning may occur, for example, about 4 μ sec before access is required. This allows the BTMs 130, 150 to complete several packet transfers and then stop communicating with their respective BTSs 160, 170, 190, 200. Subsequently the MU 120 may communicate 460 with the AP 20 for a new period $t_{802.11}$ 490.

[0051] In a further embodiment, the periods $t_{802.11}$ 490 and t_{BT} 480 are at fixed, predetermined intervals throughout the communications process. In a further embodiment, the periods $t_{802.11}$ 490 and t_{BT} 480 are equal length of time.

[0052] In a further embodiment, a BTS 160, 170, 180, 190, 200, 210 may be, for example, a headset or voice transmission device designed to transmit voice data to the BTMs 110, 130, which is then transmitted via the 802.11 network. Voice information is normally transmitted on a Bluetooth network using the periodic Synchronous Connection Oriented (SCO) protocol. This protocol is not conducive to the transmission interruptions required to coordinate with 802.11 operation. It would be more efficient, when using Bluetooth and 802.11, to transmit voice over the Bluetooth network using the ACL protocol that is normally reserved for data transmission. To use voice transmission over Bluetooth, when used in conjunction with the frequency coordination techniques disclosed herein, the Bluetooth piconet 280, 290 needs to compress and decompress the voice information in order to use the ACL protocol normally reserved for data transmissions.

[0053] Referring to Figures 7 and 8, there is shown a voice communication system 520 including a headset 521 having a BTS radio unit 210 which communicates with a dual mode mobile unit 110 using the BT protocol. The headset 521 includes an earphone in the same housing as radio unit 210 and a microphone 522. Mobile unit 110 may be arranged to be worn on the belt of a user. As shown in Figure 8, BTS 210 include microphone 522, earphone 524, and D to A and A to D converter 526 for converting sound signals to digital signals and vice versa. Digitized sound signals are compressed and arranged in packets in processor 528 and transmitted using RF module 530 and antenna 532. The reverse process is used for received signals. RF module 530 communicates with MU 110 using BT protocol in the ACL mode.

[0054] Another issue that results from attempts to coordinate 802.11 and Bluetooth devices is ensuring that the lower power Bluetooth devices are actually operating in conjunction with the higher power 802.11 devices. In this regard, a further embodiment of the present invention may be demonstrated by referring to Figure 2. Figure 2 is substantially similar to a portion of Figure 1, with the addition of a connect button 500 that provided on MUs 140 of the 802.11 network and light 540. The connect button 500, may be physically mounted on a

dual mode device 110. When activated by the user, the connect button 500 instructs the mobile units 140 to stop transmitting (timeout) for a preset amount of time. For example, the timeout could last for 10 seconds. This timeout would allow the Bluetooth piconet 290 to establish operations free from interference from 802.11 devices for the timeout period. Once established, the piconet 290 may activate light 540 to assure the user that the Bluetooth piconet 290 has in fact, been established. Once the timeout period ends, other methods for frequency coordination as described herein may be utilized.

[0055] While there have been described what are believed to be the preferred embodiments of the present invention, those skilled in the art will recognize that other changes and modifications may be made thereto without departing from the spirit of the present invention, and it is intended to claim all such changes and modifications as fall within the true scope of the invention.

1. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with a first communication protocol and using a frequency band;

a base station operating in accordance with the first communication protocol;

a second radio transceiver operating in accordance with a second communication protocol and using the frequency band;

a coordinator associated with the base station for, in turn, activating the first radio transceiver, deactivating the first radio transceiver, activating the second radio transceiver, and deactivating the second radio transceiver.

2. The apparatus of 1, wherein the frequency band is about 2.4 GHz.

3. The apparatus of 2, wherein the first communication protocol is the IEEE 802.11 protocol.

4. The apparatus of 3, wherein the second communication protocol is the Bluetooth protocol.

5. The apparatus of 4, wherein the first radio transceiver and the second radio transceiver are mounted together in a housing.

6. The apparatus of 5, wherein the housing is suitable for wearing on a belt.

7. The apparatus of 5, further comprising one or more slave devices associated with the second transceiver and operating in accordance with the second communication protocol.

8. The apparatus of 7 wherein at least one of the one or more slave devices is a scanner capable of being worn on a user's finger.

9. The apparatus of 8, wherein the scanner is capable of transmitting bar code information to the second transceiver.

10. The apparatus of 7, wherein at least one of the one or more slave devices is a printer.

11. The apparatus of 7, wherein at least one of the one or more slave devices is a personal data managing device.

12. The apparatus of 5, wherein the period between activating the first radio transceiver and deactivating the first radio transceiver comprises a first time period and wherein the period between activating the second radio transceiver and deactivating the second radio transceiver comprises a second time period, and wherein the first time period and second time period are at fixed, predetermined intervals.

13. The apparatus of 12, wherein the first time period and the second time period are of equal intervals.

14. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with a first communication protocol and using a frequency band,

a base station operating in accordance with the first communication protocol;

a second radio transceiver operating in accordance with a second communication protocol and using the frequency band, wherein the first radio transceiver and the second radio transceiver are mounted together in a housing;

a coordinator associated with the housing, for, in turn, activating the first radio transceiver, deactivating the first radio transceiver, activating the second radio transceiver, and deactivating the second radio transceiver.

15. The apparatus of 14, wherein the frequency band is about 2.4 GHz.

16. The apparatus of 15, wherein the first communication protocol is the IEEE 802.11 protocol.

17. The apparatus of 16, wherein the second communication protocol is the Bluetooth protocol.

18. The apparatus of 14, wherein the period between activating the first radio transceiver and de-

activating the first radio transceiver comprises a first time period and wherein the period between activating the second radio transceiver and deactivating the second radio transceiver comprises a second time period, and wherein the first time period and second time period are at fixed, predetermined intervals.

19. The apparatus of 18, wherein the first time period and the second time period are of equal intervals.

20. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with an IEEE 802.11 protocol and using a frequency band of about 2.4 GHz and having a first antenna system;
a base station operating in accordance with the IEEE 802.11 protocol;
a second radio transceiver operating in accordance with a Bluetooth protocol and using the frequency band of about 2.4 GHz and having a second antenna system;

wherein the first antenna system and the second antenna system are of orthogonal polarization.

21. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with an IEEE 802.11 protocol and using a frequency band of about 2.4 GHz;
a base station operating in accordance with the IEEE 802.11 protocol;
a second radio transceiver operating in accordance with a Bluetooth protocol and using the frequency band of about 2.4 GHz;

wherein the Bluetooth protocol transmission transmits at power level of about 0 dBm.

22. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with an IEEE 802.11 protocol and using a frequency band of about 2.4 GHz, the frequency band of about 2.4 GHz having two or more sub-bands;
a base station operating in accordance with the IEEE 802.11 protocol;
a second radio transceiver operating in accordance with a Bluetooth protocol and using the frequency band of about 2.4 GHz;

wherein the IEEE 802.11 protocol transceiver uses one of the two or more sub-bands and the Bluetooth protocol transceiver uses another of the two or more sub-bands.

23. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with an IEEE 802.11 protocol and using a frequency band of about 2.4 GHz, the frequency band of about 2.4 GHz having two or more sub-bands;
a base station operating in accordance with the IEEE 802.11 protocol;
a second radio transceiver operating in accordance with a Bluetooth protocol and using the frequency band of about 2.4 GHz;

wherein the second radio transceiver is equipped with a look-ahead function for determining whether the two or more sub-bands are being used by the first radio transceiver that will also be used by the second transceiver.

24. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with a first communication protocol and using a frequency band;
a base station operating in accordance with the first communication protocol;
a second radio transceiver operating in accordance with a second communication protocol and using the frequency band;
a coordinator associated with the first radio transceiver for deactivating the second radio transceiver while the first radio transceiver is in use.

25. A method for operating a portable data communications device using first and second wireless data communications protocol comprising:

operating said data communications device in a power saving mode of said first communication protocol, whereby said device has active time periods for transmitting and receiving data communications signals using said first communications protocol and dormant time periods during which said device neither transmits nor receives data communications signals using said first protocol;
operating said data communications device as a master device according to said second communications protocol whereby said data communication device controls operation of slave

devices communicating therewith; and
controlling said operation according to said
second data communications protocol to oper-
ate only during said dormant time periods.

26. A method as specified in 25 wherein said con-
trolling comprises providing a signal indicating that
said active time period will commence following a
predetermined time interval and terminating opera-
tion according to said second data communication
protocol during said predetermined time interval.

27. A method as specified in 25 wherein said first
wireless data communications protocol is the IEEE
802.11 protocol.

28. A method as specified in 27 wherein said sec-
ond wireless communication protocol is Bluetooth.

29. A method for operating a wireless data commu-
nications system having an access point and at
least one mobile unit associated with said access
point using a first wireless protocol, wherein said
mobile unit is arranged to conduct wireless data
communications with other units using a second
wireless protocol, comprising:

transmitting periodic beacon signals from said
access point according to said first wireless
protocol;

transmitting global clear to send signals from
said access point according to said first wire-
less protocol, said global clear to send signals
preventing mobile units from transmitting sig-
nals using said first data communications pro-
tocol during an allocated time interval within
said beacon signal period;

controlling said access point to avoid transmis-
sions during said allocated time interval;

operating said mobile unit in response to said
global clear to send signal to conduct wireless
communications acting as a master unit using
said second wireless protocol during said allo-
cated time interval.

30. A method as specified in 29 wherein said first
wireless data communications protocol is the IEEE
802.11 protocol.

31. A method as specified in 30 wherein said sec-
ond wireless communication protocol is Bluetooth.

32. A method according to 29 wherein said beacon
signal period is divided into three time intervals, and
wherein said access point conducts power saving
mode data communications during a first time inter-
val, wherein said allocated time interval is a second
time interval and wherein said access point con-

ducts data communications using said first wireless
protocol during a third time interval.

33. A method according to 32 wherein said first time
interval is immediately following said beacon signal.

34. A method as specified in 32 wherein said first
wireless data communications protocol is the IEEE
802.11 protocol.

35. A method as specified in 34 wherein said sec-
ond wireless communication protocol is Bluetooth.

36. A method of operating a data communications
system using a master-slave protocol, wherein a
master transceiver transmits to slave units during
first even time slots and wherein slave units transmit
to said master unit during odd time slots, and where-
in said transmissions follow a predetermined fre-
quency hop pattern at a hop rate corresponding to
said time slots, comprising:

operating said master unit during a first time pe-
riod of each time slot to detect interfering sig-
nals at a frequency corresponding to the follow-
ing time slot, and

inhibiting transmission by said master trans-
ceiver during even time slots if interfering sig-
nals have been detected during either of the
current or previous time slots.

37. A method according to 36, wherein said operat-
ing step comprises tuning said master unit to re-
ceive signals corresponding to the frequency allo-
cated to the next following time slot; detecting the
strength of signals received and retuning said mas-
ter unit to send or receive signals corresponding to
the frequency allocated to the current time slot.

38. A method according to 37 wherein said protocol
is Bluetooth.

39. A method for providing voice communications
in a wireless data communications system having
a mobile unit arranged to communicate with an ac-
cess point using a first data communications proto-
col and arranged to communicate with other devic-
es using a second data communications protocol,
comprising:

communicating data corresponding to said
voice communication between said access
point and said mobile unit using said first data
communications protocol;

communicating said data corresponding to said
voice communications between said mobile
unit and a portable device using said second
data communication protocol, said communi-

cation being arranged at time intervals which avoid interference with said communicating using said first data communications protocol; and

converting voice signals to data corresponding to said voice signals and converting data signals corresponding to voice signal into voice signals in said portable device. 5

40. A method as specified in 39 wherein said data corresponding to voice signals comprises compressed voice signal data. 10

41. A method as specified in the 39 wherein said first communications protocol is the IEEE 802.11 protocol. 15

42. A method according to 41 wherein said second communication protocol is Bluetooth. 20

43. A method according to 42 wherein said communication between said mobile unit and said portable device uses a Bluetooth ACL link.

44. A method as specified in 43 wherein said data corresponding to voice signals comprises compressed voice signal data. 25

45. A method for operating a mobile unit arranged to communicate using first and second data communication protocols operating in the same frequency band wherein said mobile unit associates with an access point and receives therefrom beacon signals demarcating time intervals according to said first communications protocol, comprising: 30 35

receiving signals from said access point designating a portion of one of said time intervals during which mobile units associated with said access point refrain from transmissions using said first data communications protocol, and operating said mobile unit as a master unit using said second data communications protocol to communicate with slave units during said designated portion of said time interval. 40 45

46. A method as specified in 45 wherein said first protocol is the IEEE 802.11 protocol.

47. A method as specified in 46 wherein said signals comprise CTS signals. 50

48. A method as specified in 47 wherein said second protocol is Bluetooth.

49. A method for operating a wireless data communications network having at least one access point and at least one mobile unit, including a mobile unit

arranged to communicate with said access point using a first wireless data communication protocol in a first frequency band and to communicate with other devices using a second wireless data communication protocol in said first frequency band, comprising:

transmitting signals from said access point in said first communications protocol, said signals designating a time period wherein mobile units associated with said access point refrain from transmitting using said first data communications protocol; and operating said mobile units as a master unit to conduct wireless data communications with said other devices operating as slave units using said second data communications protocol during said designated time period.

50. A method as specified in 49 wherein said first communications protocol is the IEEE 802.11 protocol.

51. A method as specified in 49 wherein said signals comprise CTS signals.

52. A method for operating a mobile unit arranged to communicate using first and second data communications protocols operating in the same frequency band, wherein said mobile unit associates with an access point, comprising:

receiving in said mobile unit first and second control signals using said first data communications protocol; operating said mobile unit in response to said first control signals to act as a master unit and conduct data communications with slave units using said second data communications protocol; and discontinuing communications by said mobile unit using said second data communications protocol in response to said second control signal.

53. A method as specified in 41 wherein said first protocol is the IEEE 802.11 protocol.

54. A method as specified in 42 wherein said signals comprise CTS signals.

Claims

55 1. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance

- with a first communication protocol and using a frequency band;
 a base station operating in accordance with the first communication protocol;
 a second radio transceiver operating in accordance with a second communication protocol and using the frequency band;
 a coordinator associated with the base station for, in turn, activating the first radio transceiver, deactivating the first radio transceiver, activating the second radio transceiver, and deactivating the second radio transceiver.
2. The apparatus of claim 1, wherein the frequency band is about 2.4 GHz,
 and/ or wherein preferably the first communication protocol is the IEEE 802.11 protocol,
 and/ or wherein preferably the second communication protocol is the Bluetooth protocol,
 and/ or wherein preferably the first radio transceiver and the second radio transceiver are mounted together in a housing,
 and/ or wherein preferably the housing is suitable for wearing on a belt.
3. The apparatus of claim 1 or 2, further comprising one or more slave devices associated with the second transceiver and operating in accordance with the second communication protocol.
4. The apparatus of claim 3, wherein at least one of the one or more slave devices is a scanner capable of being worn on a user's finger,
 and/ or wherein preferably the scanner is capable of transmitting bar code information to the second transceiver,
 and/ or wherein preferably at least one of the one or more slave devices is a printer,
 and/ or wherein preferably at least one of the one or more slave devices is a personal data managing device.
5. The apparatus of claim 1 or 2, wherein the period between activating the first radio transceiver and deactivating the first radio transceiver comprises a first time period and wherein the period between activating the second radio transceiver and deactivating the second radio transceiver comprises a second time period, and wherein the first time period and second time period are at fixed, predetermined intervals.
6. The apparatus of claim 5, wherein the first time period and the second time period are of equal intervals.
7. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with a first communication protocol and using a frequency band,
 a base station operating in accordance with the first communication protocol;
 a second radio transceiver operating in accordance with a second communication protocol and using the frequency band, wherein the first radio transceiver and the second radio transceiver are mounted together in a housing;
 a coordinator associated with the housing, for, in turn, activating the first radio transceiver, deactivating the first radio transceiver, activating the second radio transceiver, and deactivating the second radio transceiver.

8. The apparatus of claim 7, wherein the frequency band is about 2.4 GHz,
 and/ or wherein preferably the first communication protocol is the IEEE 802.11 protocol,
 and/ or wherein preferably the second communication protocol is the Bluetooth protocol.
9. The apparatus of claim 7 or 8, wherein the period between activating the first radio transceiver and deactivating the first radio transceiver comprises a first time period and wherein the period between activating the second radio transceiver and deactivating the second radio transceiver comprises a second time period, and wherein the first time period and second time period are at fixed, predetermined intervals,
 and/ or wherein preferably the first time period and the second time period are of equal intervals.
10. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with an IEEE 802.11 protocol and using a frequency band of about 2.4 GHz and having a first antenna system;
 a base station operating in accordance with the IEEE 802.11 protocol;
 a second radio transceiver operating in accordance with a Bluetooth protocol and using the frequency band of about 2.4 GHz and having a second antenna system;

wherein the first antenna system and the second antenna system are of orthogonal polarization.

11. Apparatus for transmission coordination, comprising:

a first radio transceiver operating in accordance with an IEEE 802.11 protocol and using a frequency band of about 2.4 GHz;

a base station operating in accordance with the IEEE 802.11 protocol;
 a second radio transceiver operating in accordance with a Bluetooth protocol and using the frequency band of about 2.4 GHz;

5

wherein the Bluetooth protocol transmission transmits at power level of about 0 dBm.

12. Apparatus for transmission coordination, comprising:

10

a first radio transceiver operating in accordance with an IEEE 802.11 protocol and using a frequency band of about 2.4 GHz, the frequency band of about 2.4 GHz having two or more sub-bands;

15

a base station operating in accordance with the IEEE 802.11 protocol;

a second radio transceiver operating in accordance with a Bluetooth protocol and using the frequency band of about 2.4 GHz;

20

wherein the IEEE 802.11 protocol transceiver uses one of the two or more sub-bands and the Bluetooth protocol transceiver uses another of the two or more sub-bands.

25

13. Apparatus for transmission coordination, comprising:

30

a first radio transceiver operating in accordance with an IEEE 802.11 protocol and using a frequency band of about 2.4 GHz, the frequency band of about 2.4 GHz having two or more sub-bands;

35

a base station operating in accordance with the IEEE 802.11 protocol;

a second radio transceiver operating in accordance with a Bluetooth protocol and using the frequency band of about 2.4 GHz;

40

wherein the second radio transceiver is equipped with a look-ahead function for determining whether the two or more sub-bands are being used by the first radio transceiver that will also be used by the second transceiver.

45

14. Apparatus for transmission coordination, comprising:

50

a first radio transceiver operating in accordance with a first communication protocol and using a frequency band;

a base station operating in accordance with the first communication protocol;

55

a second radio transceiver operating in accordance with a second communication protocol

and using the frequency band;

a coordinator associated with the first radio transceiver for deactivating the second radio transceiver while the first radio transceiver is in use.

15. A method for operating a portable data communications device using first and second wireless data communications protocol comprising:

operating said data communications device in a power saving mode of said first communication protocol, whereby said device has active time periods for transmitting and receiving data communications signals using said first communication protocol and dormant time periods during which said device neither transmits nor receives data communications signals using said first protocol;

operating said data communications device as a master device according to said second communication protocol whereby said data communication device controls operation of slave devices communicating therewith; and

controlling said operation according to said second data communications protocol to operate only during said dormant time periods.

16. A method as specified in claim 15 wherein said controlling comprises providing a signal indicating that said active time period will commence following a predetermined time interval and terminating operation according to said second data communication protocol during said predetermined time interval,

and/ or wherein preferably said first wireless data communications protocol is the IEEE 802.11 protocol,

and/ or wherein preferably said second wireless communication protocol is Bluetooth.

17. A method for operating a wireless data communications system having an access point and at least one mobile unit associated with said access point using a first wireless protocol, wherein said mobile unit is arranged to conduct wireless data communications with other units using a second wireless protocol, comprising:

transmitting periodic beacon signals from said access point according to said first wireless protocol;

transmitting global clear to send signals from said access point according to said first wireless protocol, said global clear to send signals preventing mobile units from transmitting signals using said first data communications protocol during an allocated time interval within said beacon signal period;

controlling said access point to avoid transmissions during said allocated time interval;
operating said mobile unit in response to said global clear to send signal to conduct wireless communications acting as a master unit using said second wireless protocol during said allocated time interval. 5

18. A method as specified in claim 17 wherein said first wireless data communications protocol is the IEEE 802.11 protocol, 10

and/ or wherein preferably said second wireless communication protocol is Bluetooth,

and/ or wherein preferably said beacon signal period is divided into three time intervals, and wherein said access point conducts power saving mode data communications during a first time interval, wherein said allocated time interval is a second time interval and wherein said access point conducts data communications using said first wireless protocol during a third time interval, 15 20

and/ or wherein preferably said first time interval is immediately following said beacon signal,

and/ or wherein preferably said first wireless data communications protocol is the IEEE 802.11 protocol 25

and/ or wherein preferably, said second wireless communication protocol is Bluetooth.

19. A method of operating a data communications system using a master-slave protocol, wherein a master transceiver transmits to slave units during first even time slots and wherein slave units transmit to said master unit during odd time slots, and wherein said transmissions follow a predetermined frequency hop pattern at a hop rate corresponding to said time slots, comprising: 30 35

operating said master unit during a first time period of each time slot to detect interfering signals at a frequency corresponding to the following time slot, and 40

inhibiting transmission by said master transceiver during even time slots if interfering signals have been detected during either of the current or previous time slots. 45

20. A method according to claim 36, wherein said operating step comprises tuning said master unit to receive signals corresponding to the frequency allocated to the next following time slot; detecting the strength of signals received and retuning said master unit to send or receive signals corresponding to the frequency allocated to the current time slot, 50
and/ or wherein preferably said protocol is Bluetooth. 55

21. A method for providing voice communications in a

wireless data communications system having a mobile unit arranged to communicate with an access point using a first data communications protocol and arranged to communicate with other devices using a second data communications protocol, comprising:

communicating data corresponding to said voice communication between said access point and said mobile unit using said first data communications protocol;

communicating said data corresponding to said voice communications between said mobile unit and a portable device using said second data communication protocol, said communication being arranged at time intervals which avoid interference with said communicating using said first data communications protocol; and

converting voice signals to data corresponding to said voice signals and converting data signals corresponding to voice signal into voice signals in said portable device.

22. A method as specified in claim 21 wherein said data corresponding to voice signals comprises compressed voice signal data,

and/ or wherein preferably said first communications protocol is the IEEE 802.11 protocol,

and/ or wherein preferably said second communication protocol is Bluetooth,

and/ or wherein preferably said communication between said mobile unit and said portable device uses a Bluetooth ACL link,

and/ or wherein preferably said data corresponding to voice signals comprises compressed voice signal data.

23. A method for operating a mobile unit arranged to communicate using first and second data communication protocols operating in the same frequency band wherein said mobile unit associates with an access point and receives therefrom beacon signals demarcating time intervals according to said first communications protocol, comprising:

receiving signals from said access point designating a portion of one of said time intervals during which mobile units associated with said access point refrain from transmissions using said first data communications protocol, and operating said mobile unit as a master unit using said second data communications protocol to communicate with slave units during said designated portion of said time interval.

24. A method as specified in claim 45 wherein said first protocol is the IEEE 802.11 protocol,

and/ or wherein preferably said signals comprise CTS signals,

and/ or wherein preferably said second protocol is Bluetooth.

5

25. A method for operating a wireless data communications network having at least one access point and at least one mobile unit, including a mobile unit arranged to communicate with said access point using a first wireless data communication protocol in a first frequency band and to communicate with other devices using a second wireless data communication protocol in said first frequency band, comprising:

10

15

transmitting signals from said access point in said first communications protocol, said signals designating a time period wherein mobile units associated with said access point refrain from transmitting using said first data communications protocol; and
operating said mobile units as a master unit to conduct wireless data communications with said other devices operating as slave units using said second data communications protocol during said designated time period.

20

25

26. A method as specified in claim 25 wherein said first communications protocol is the IEEE 802.11 protocol,
and/ or wherein preferably said signals comprise CTS signals.

30

27. A method for operating a mobile unit arranged to communicate using first and second data communications protocols operating in the same frequency band, wherein said mobile unit associates with an access point, comprising:

35

receiving in said mobile unit first and second control signals using said first data communications protocol;
operating said mobile unit in response to said first control signals to act as a master unit and conduct data communications with slave units using said second data communications protocol; and
discontinuing communications by said mobile unit using said second data communications protocol in response to said second control signal.

40

45

50

28. A method as specified in claim 27 wherein said first protocol is the IEEE 802.11 protocol,
and/ or wherein preferably said signals comprise CTS signals.

55

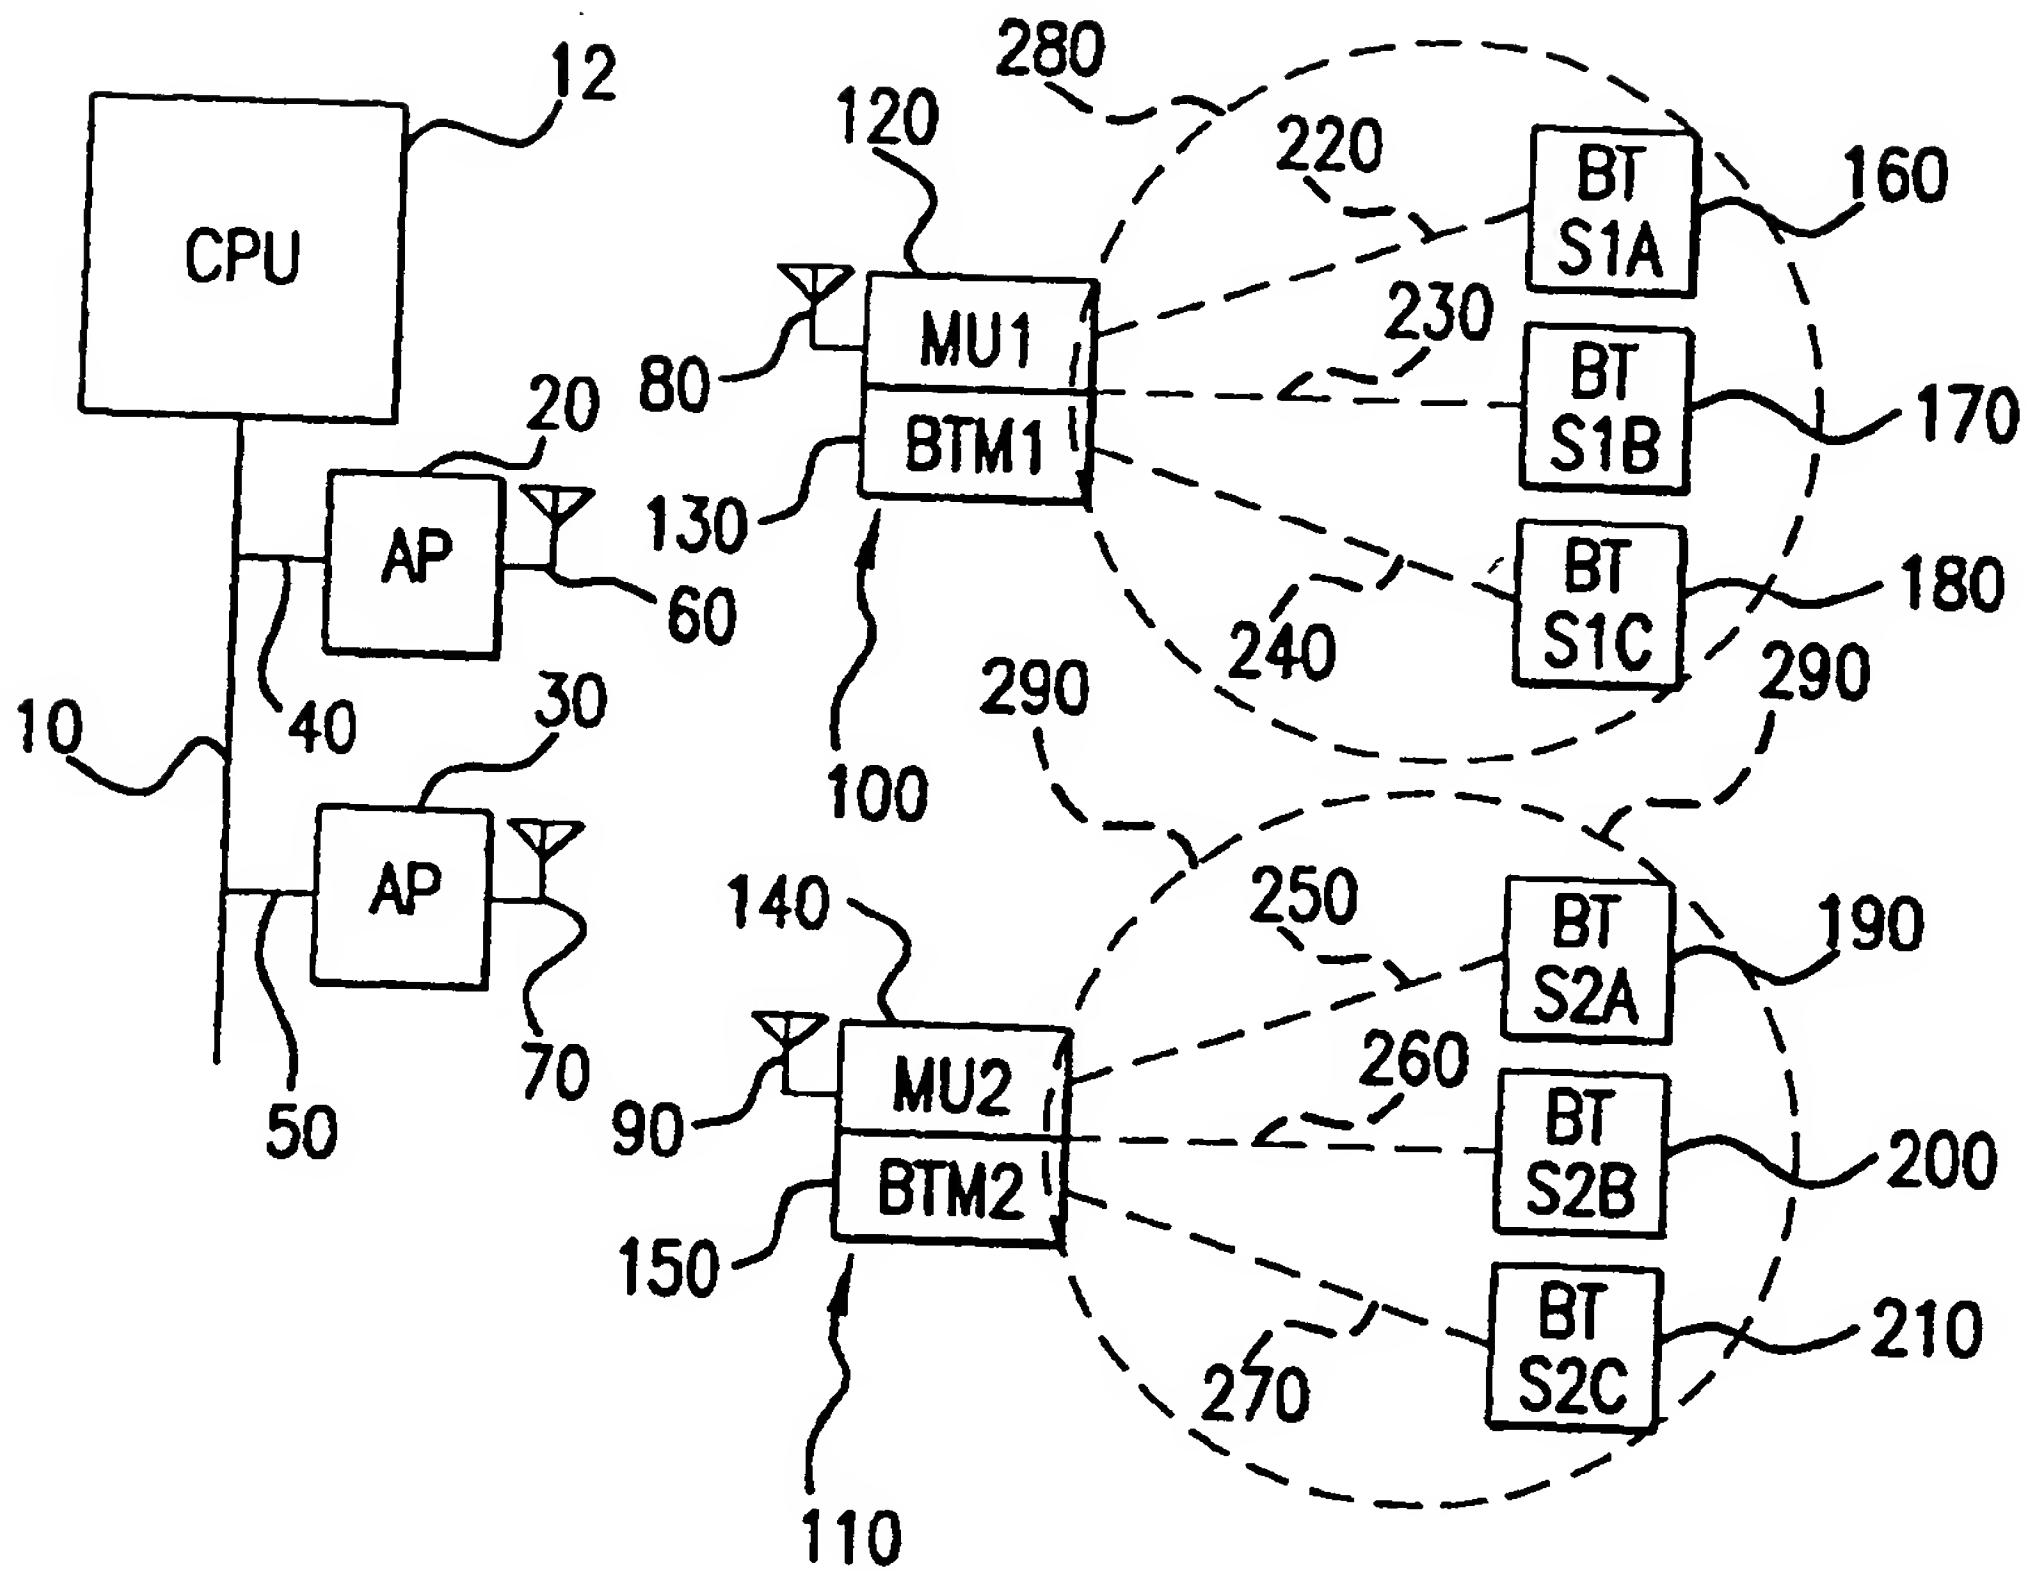


FIG.1

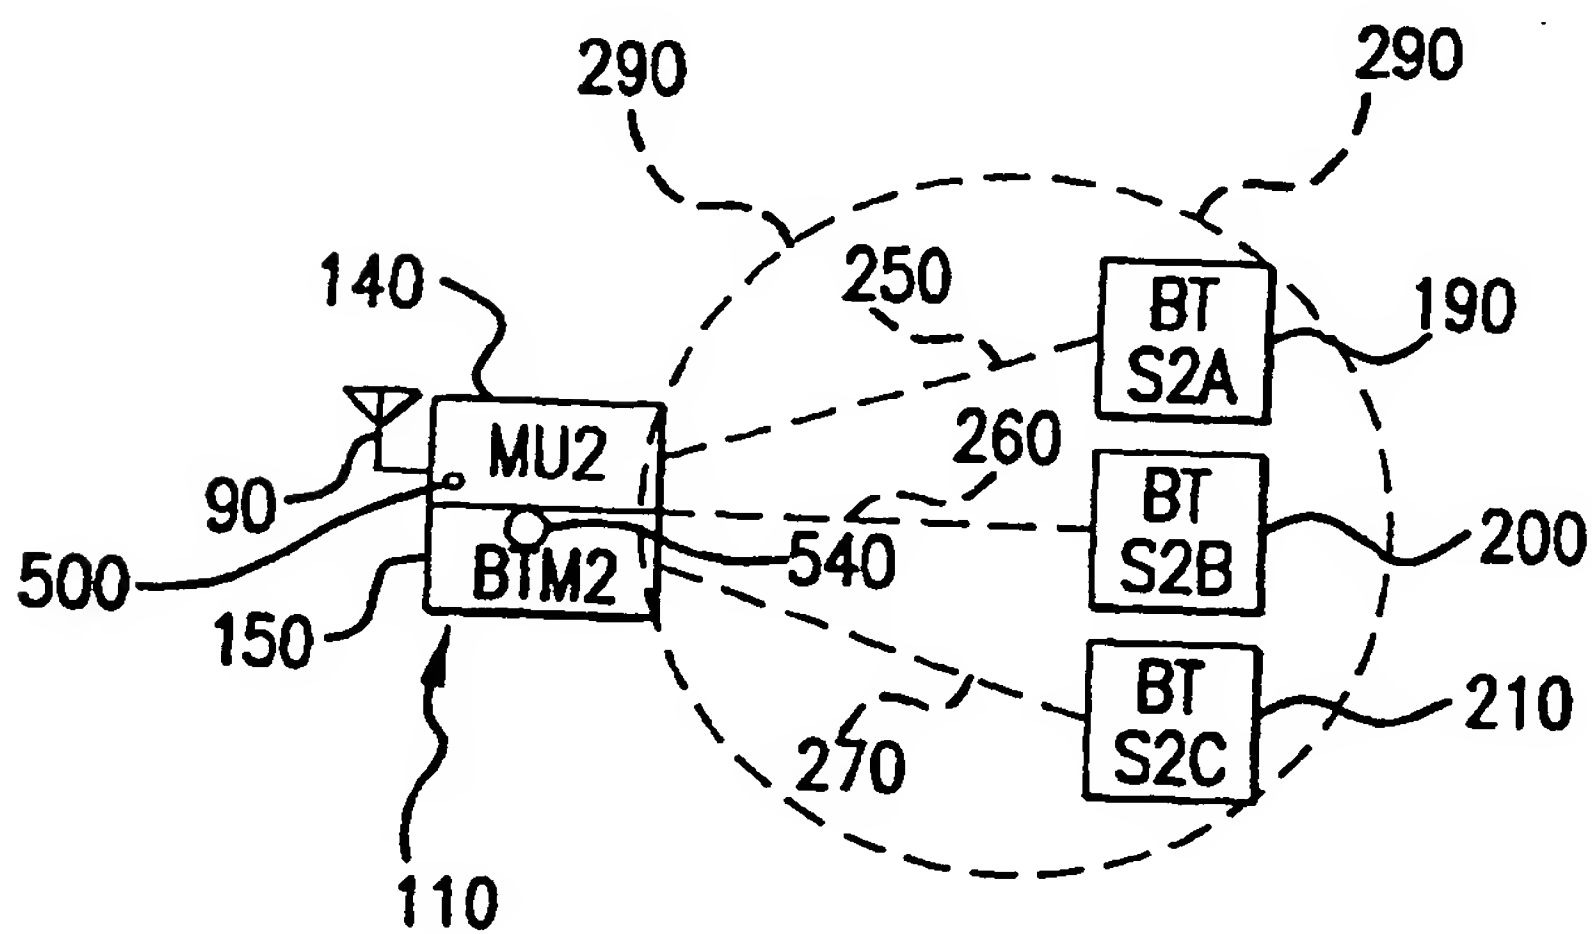


FIG.2

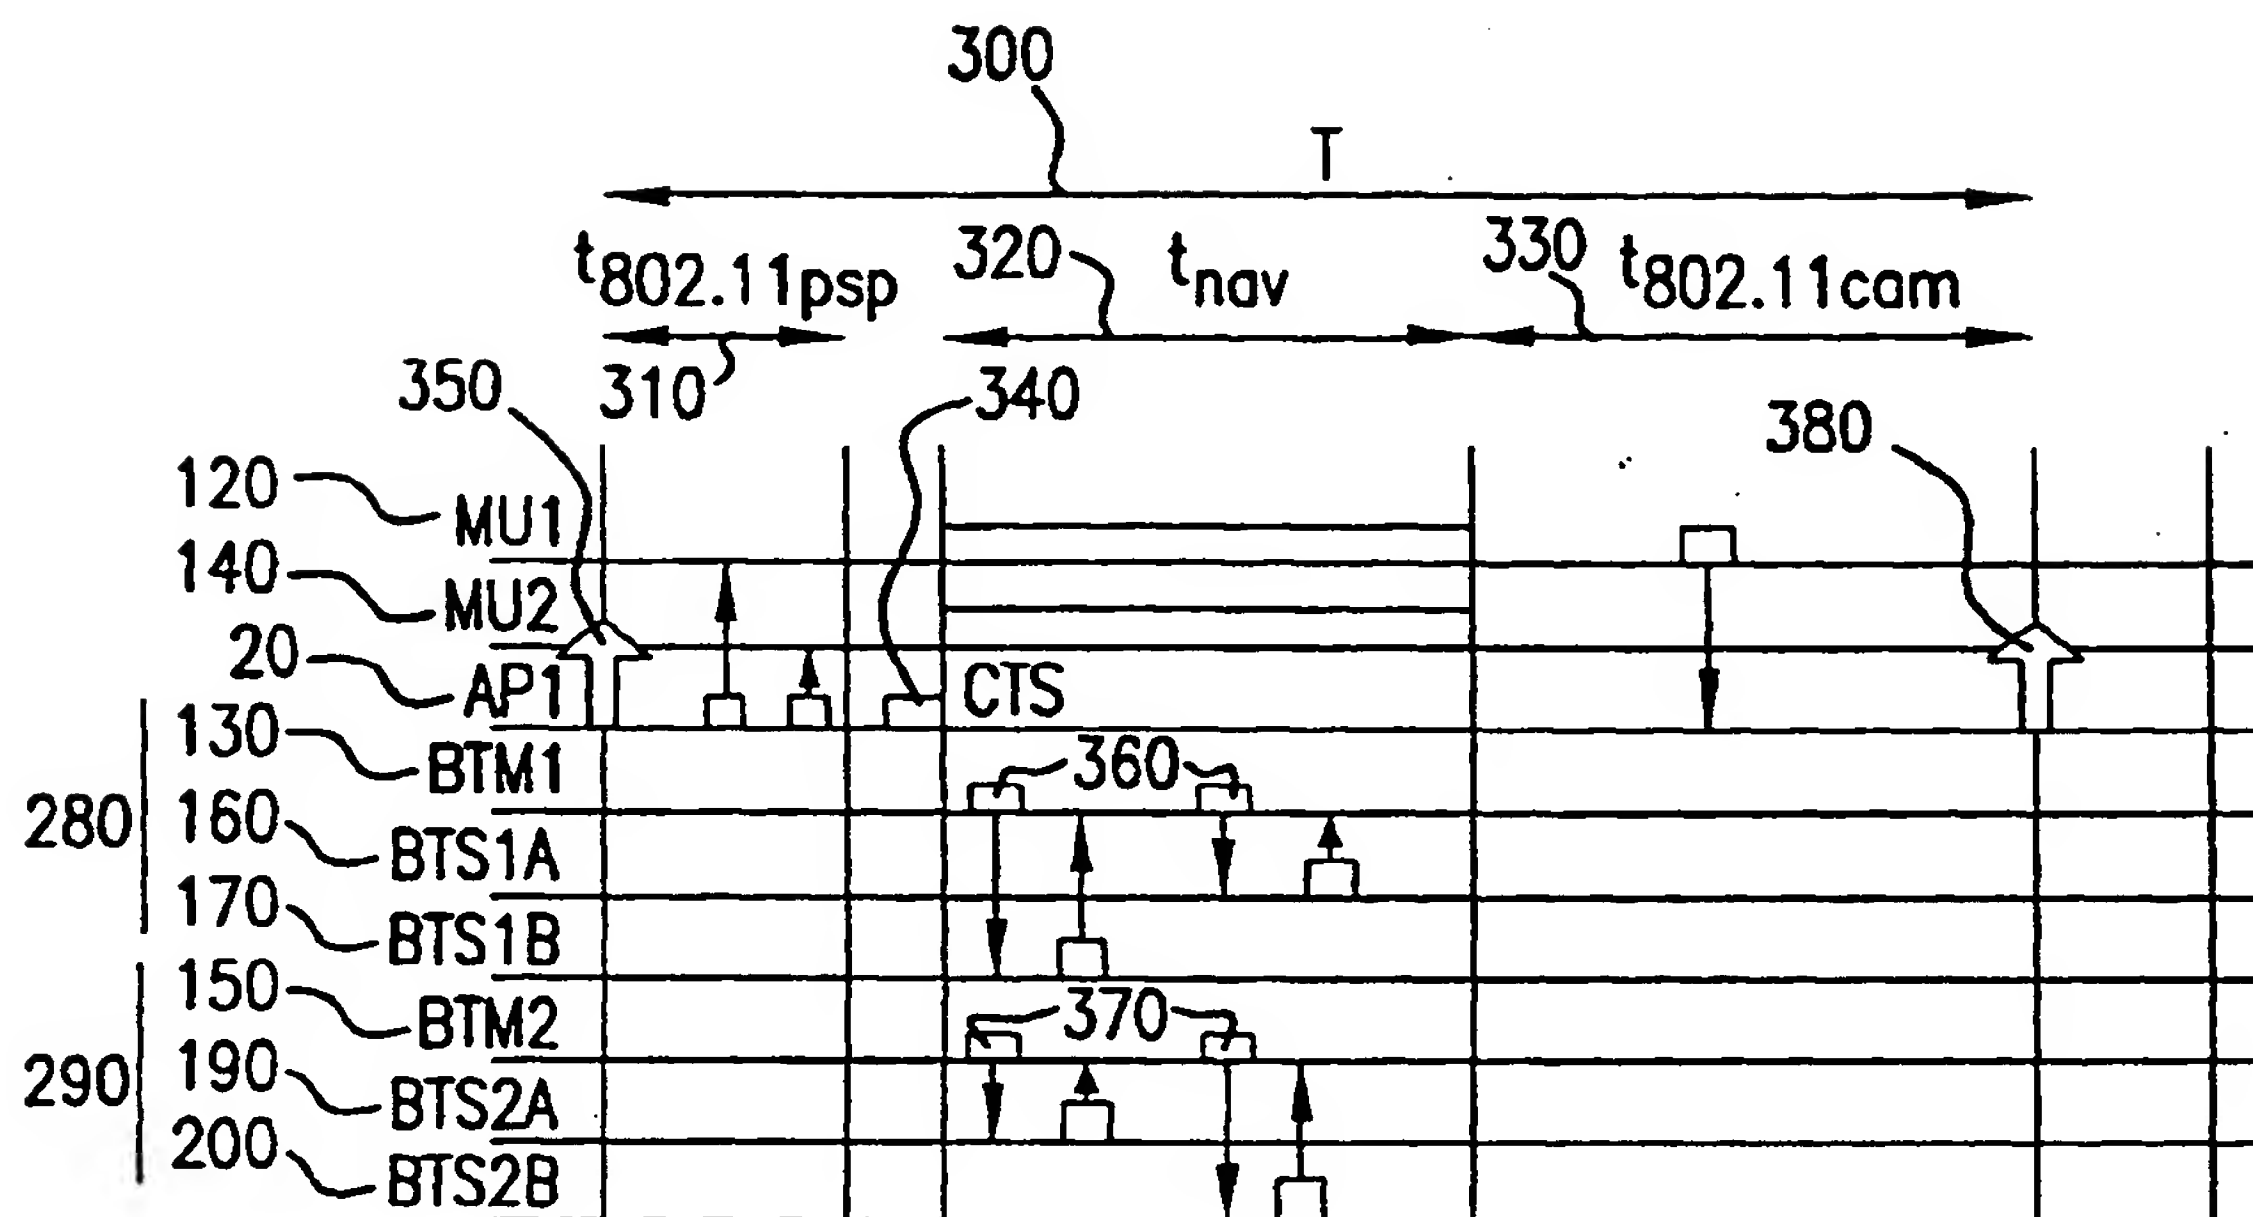


FIG. 3

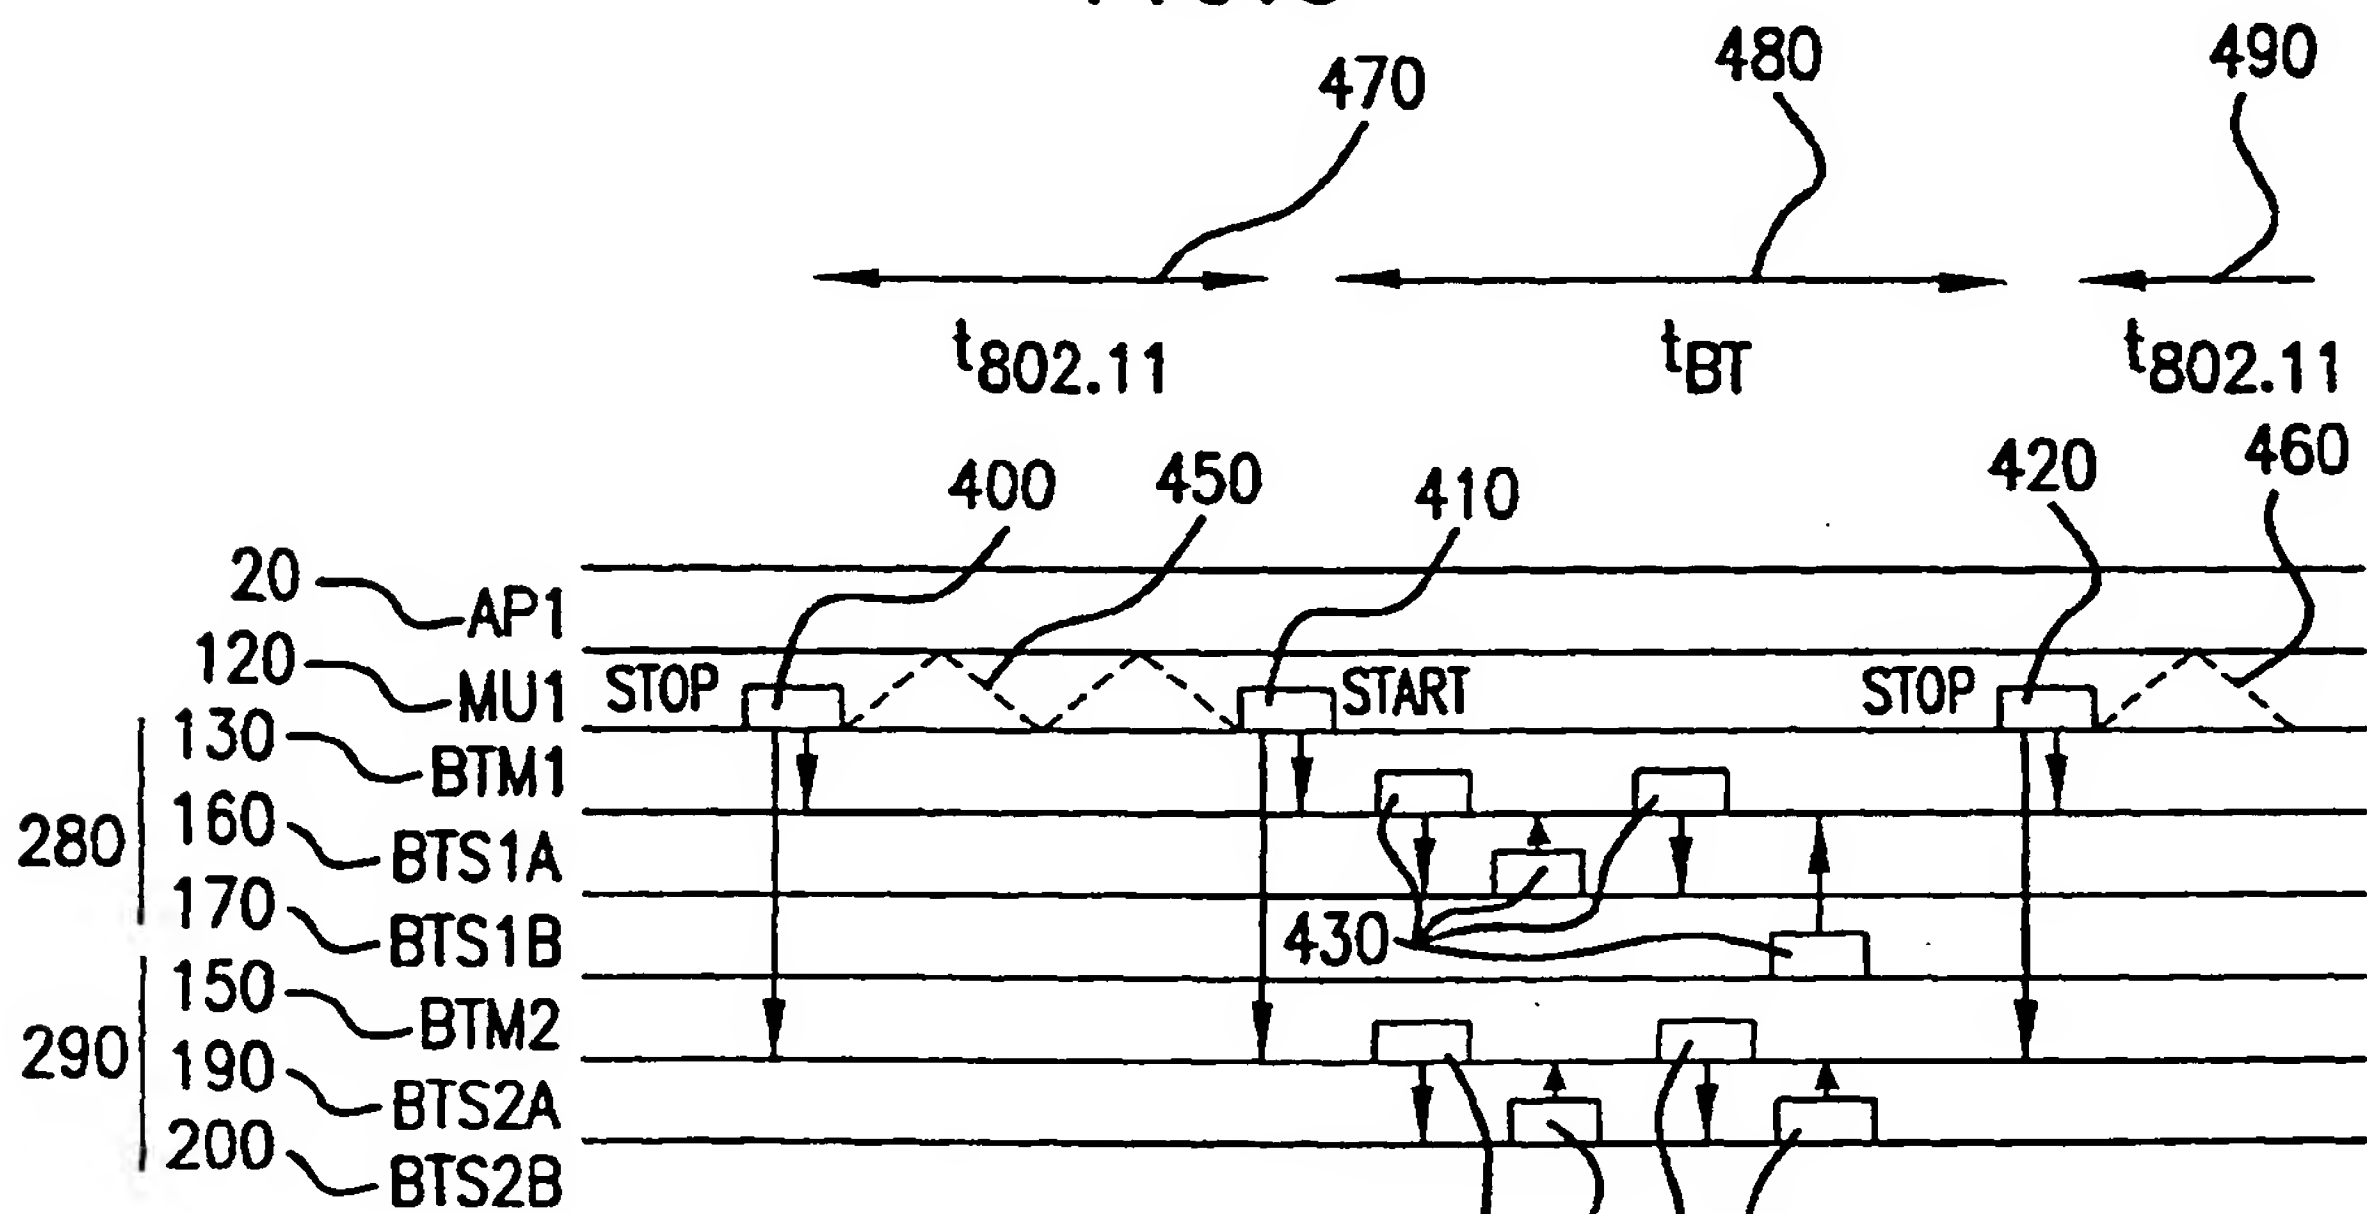


FIG. 4

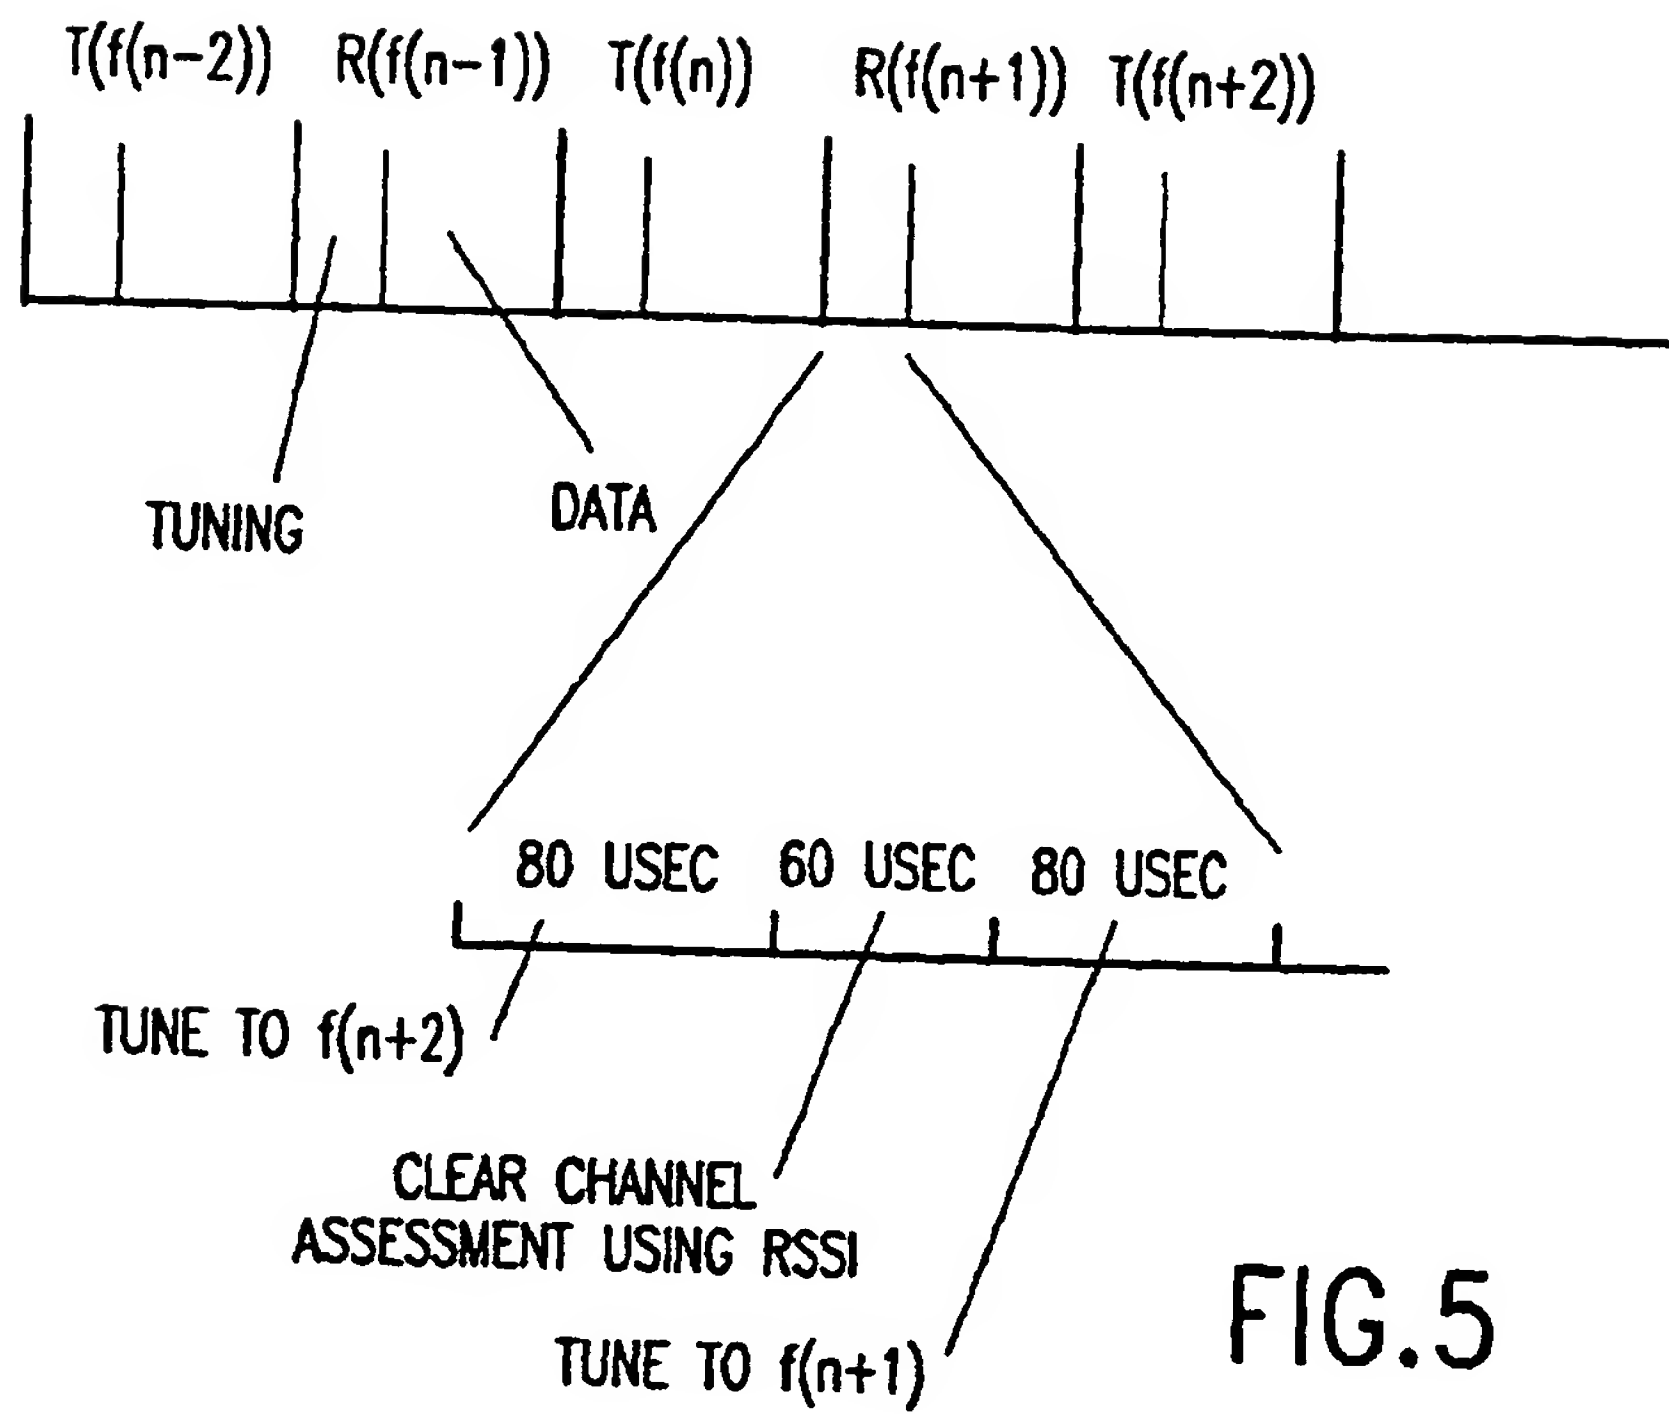


FIG.5

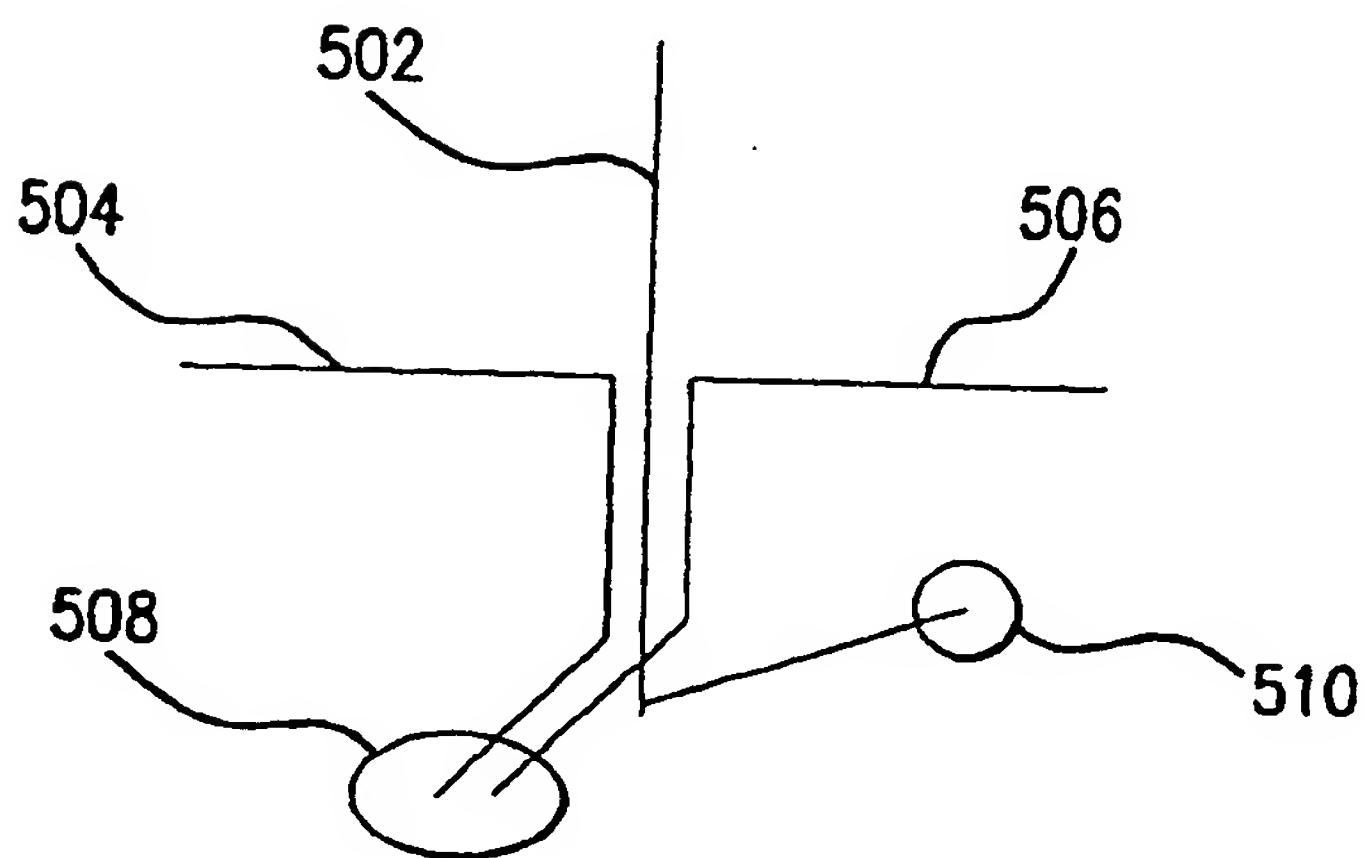


FIG.6

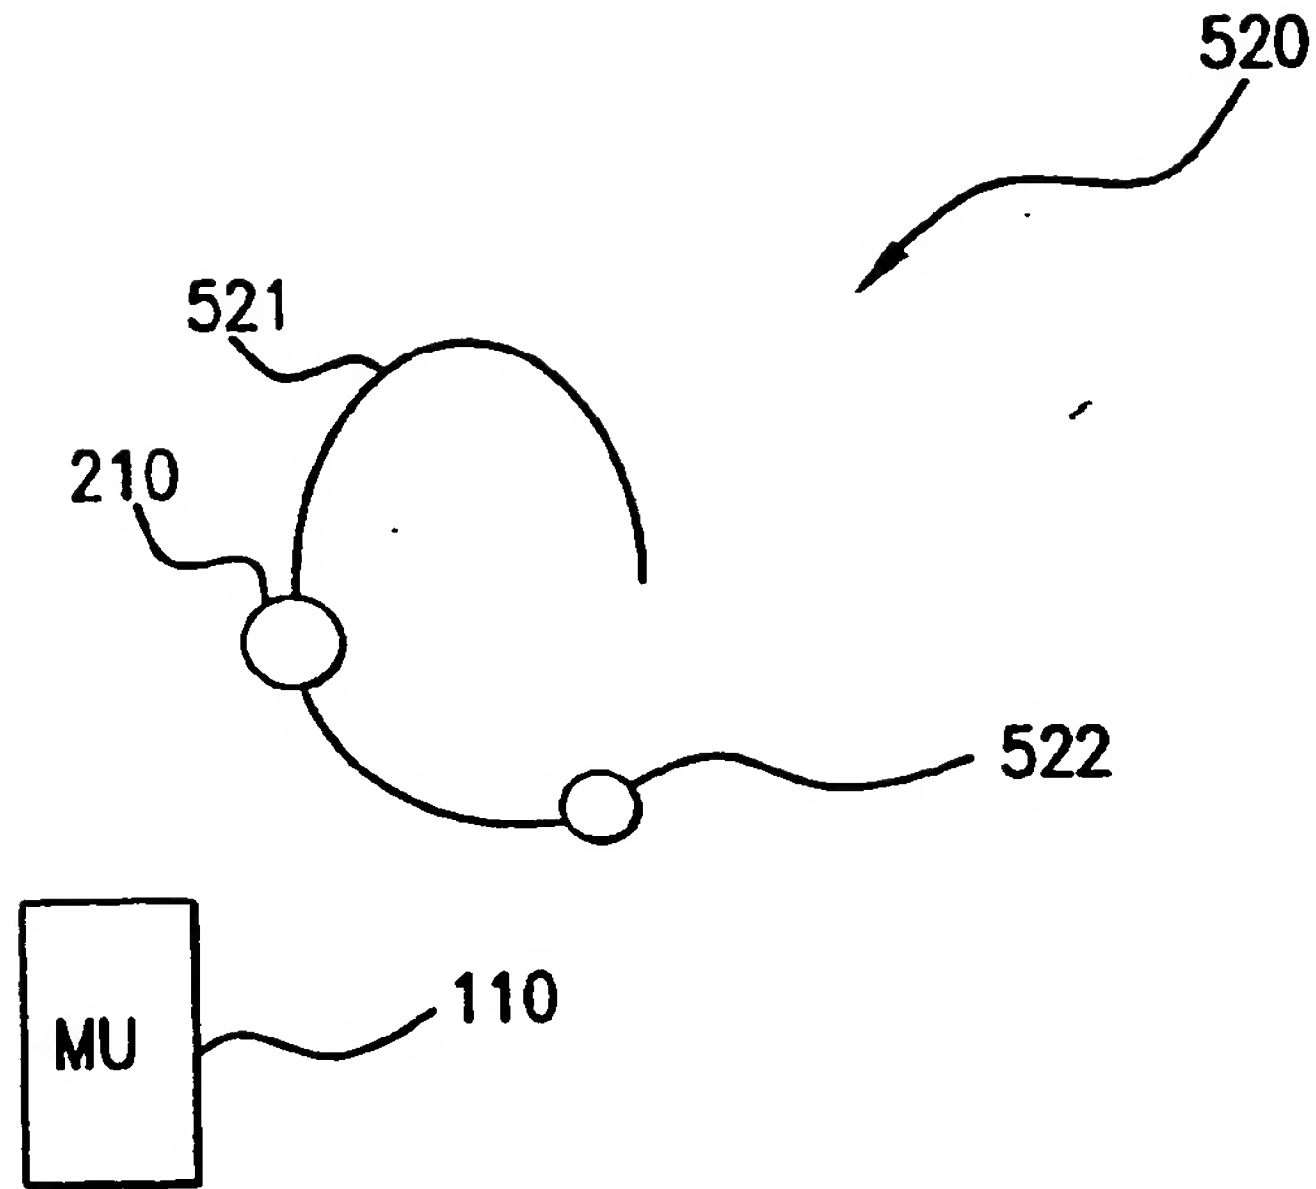


FIG. 7


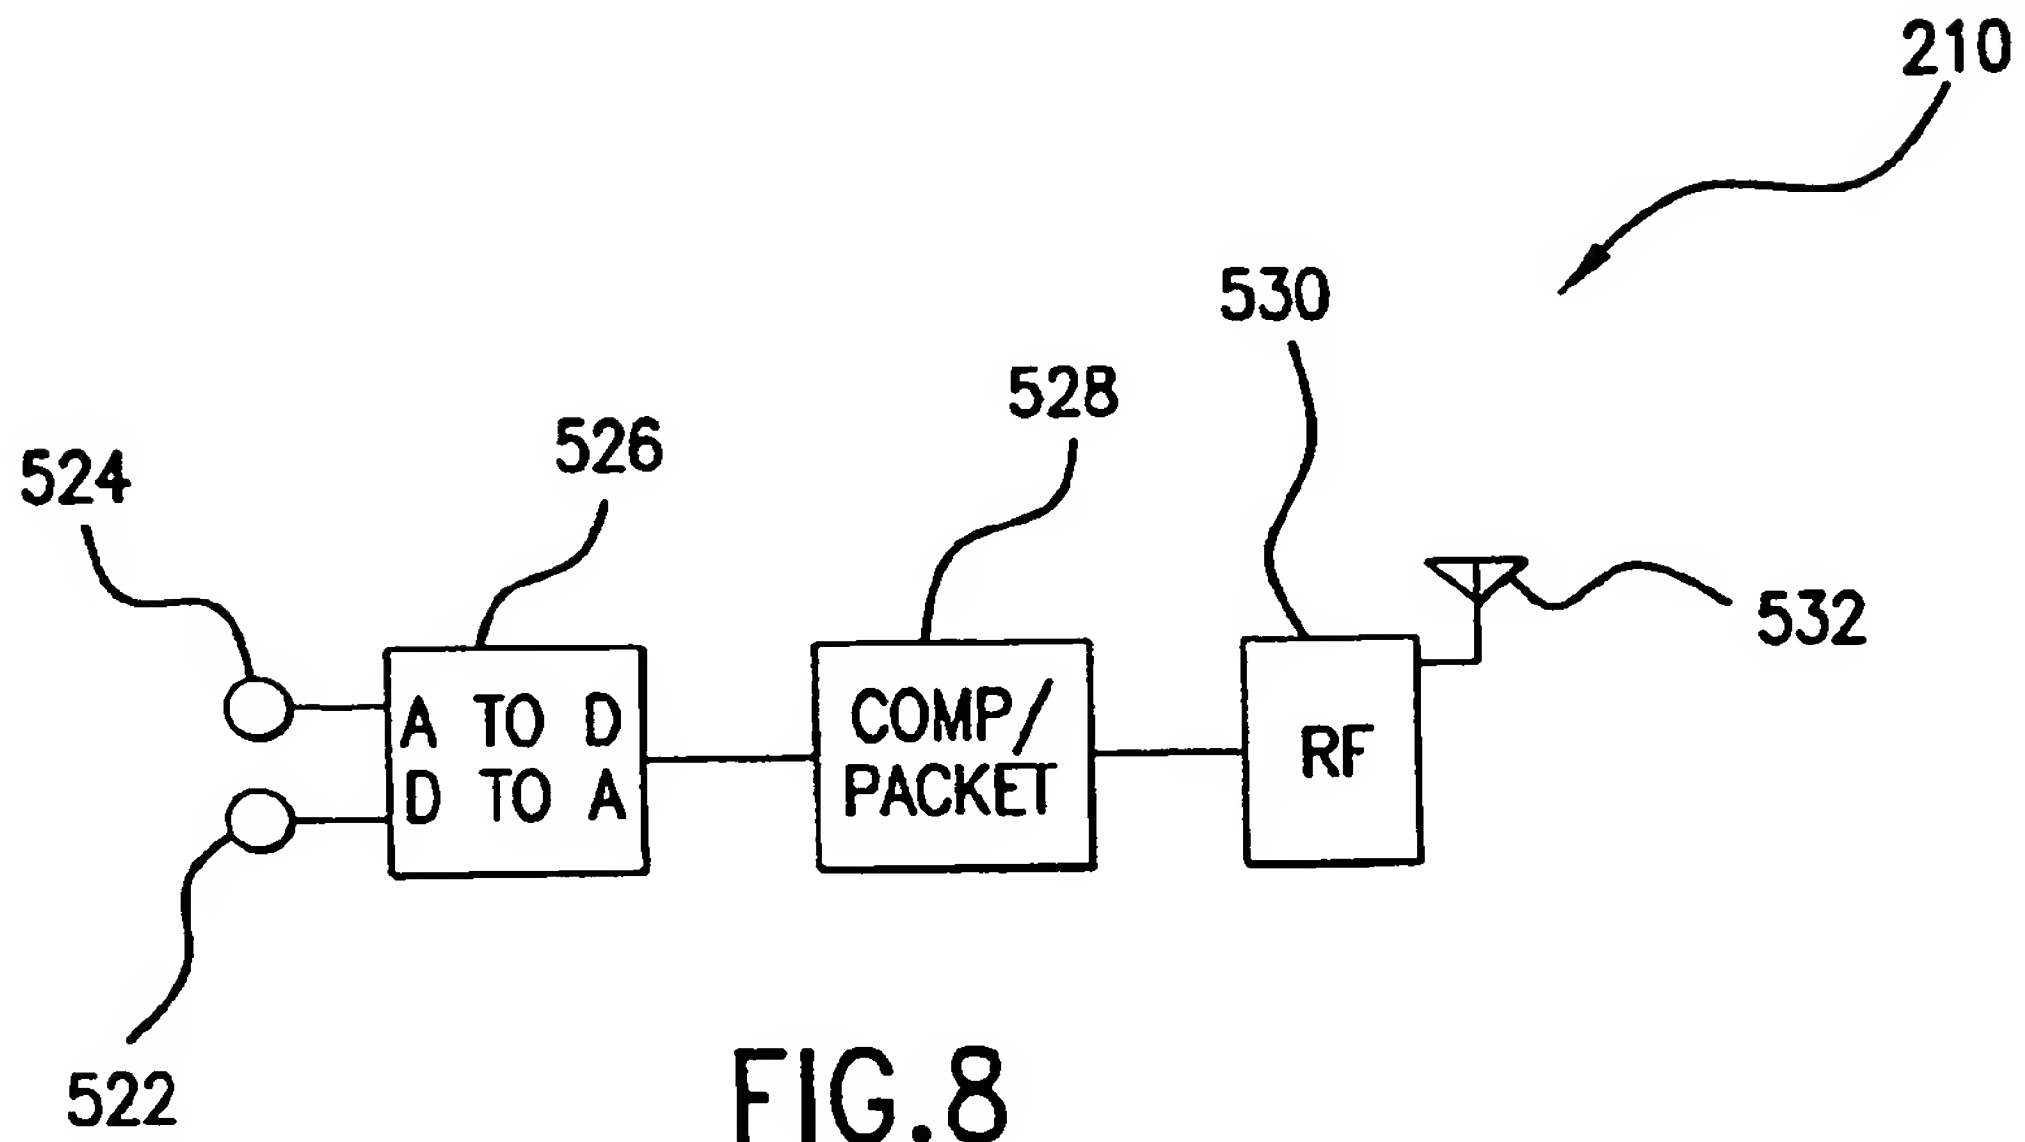


FIG. 8

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets

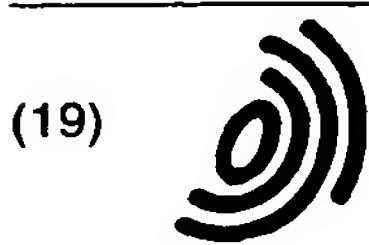

(11) **EP 1 207 654 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
09.06.2004 Bulletin 2004/24

(51) Int Cl.7: **H04L 12/56, H04L 12/28**

(43) Date of publication A2:
22.05.2002 Bulletin 2002/21

(21) Application number: 01122651.1

(22) Date of filing: 27.09.2001

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 16.11.2000 US 714803

(71) Applicant: **SYMBOL TECHNOLOGIES, INC.**
Holtsville, New York 11742-1300 (US)

(72) Inventors:
• **Shellhammer, Stephen J.**
Lake Grove, NY 11755 (US)
• **Sharony, Jacob**
Dix Hills, NY 11746 (US)
• **Bluso, Anthony D.**
South Setauket, NY 11720 (US)

• **Connolly, Sean A.**
Stony Brook, NY 11790 (US)
• **Sackett, William**
Rocky Point, NY 11778 (US)
• **Cabana, Joseph**
Centereach, NY 11720 (US)
• **Tilley, Patrick**
Coram, NY 11727 (US)
• **Beach, Robert**
Los Altos, CA 94204 (US)

(74) Representative:
Geyer, Ulrich F., Dr. Dipl.-Phys. et al
WAGNER & GEYER,
Patentanwälte,
Gewürzmühlstrasse 5
80538 München (DE)

(54) **Coexistence techniques in wireless networks**

(57) Techniques are provided for frequency coordination among two different wireless network protocols, such as the IEEE 802.11 and Bluetooth protocols, operating in proximity with one another. Coordination is accomplished by the use of a first radio transceiver operating in accordance with a first communication protocol (which may be the 802.11 protocol) and using a frequency band (which may be the 2.4 GHz band), a base station connected to a wired network and operating in accordance with the first communication protocol, a second radio transceiver operating in accordance with a second communication protocol (which may be the Bluetooth protocol) and using the frequency band, and a coordinator associated with the base station for, in turn, activating the first radio transceiver, deactivating the first radio transceiver, activating the second radio transceiver, and deactivating the second radio transceiver.

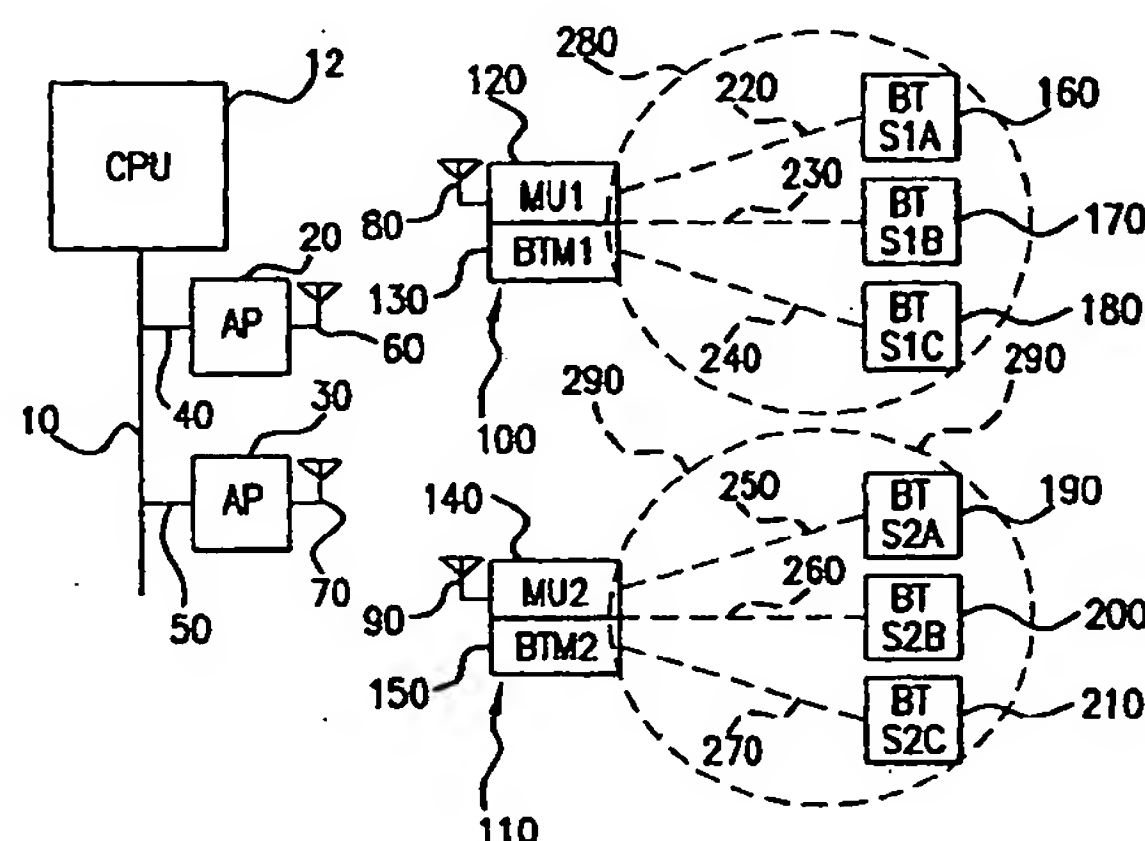


FIG.1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 2651

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	KAMERMAN, A: "Coexistence between Bluetooth and IEEE 802.11 CCK Solutions to avoid mutual interference" IEEE 802.11-00/162, [Online] 30 June 2000 (2000-06-30), XP002256503 Retrieved from the Internet: URL: http://grouper.ieee.org/groups/802/11/index.html > [retrieved on 2003-10-02] * page 1, line 17 - line 18 *	11,13	H04L12/56 H04L12/28
Y		1-10,12, 14-16, 21-23, 25,27 17,18, 24,26	
A	* page 4, line 7 - line 14 * * page 5, line 6 - page 6, line 9 *		
Y	WO 99/29126 A (JOERESSEN OLAF J ;NOKIA MOBILE PHONES LTD (FI)) 10 June 1999 (1999-06-10) * page 1, line 20 - line 24 * * page 2, line 12 - line 14 * * page 8, line 20 - line 25 * * page 11, line 28 - line 29 *	7-9,14, 21-23,27	
A	* page 12, line 5 - line 22 * * claims 1,2,8 * * figure 4 *	5,6,16, 18	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q H04L
Y	US 5 793 757 A (UDDENFELDT JAN) 11 August 1998 (1998-08-11) * column 7, line 1 - line 8 * * column 8, line 1 - line 4 * * column 7, line 27 - line 32 * * figure 5 *	1-6,25 16,21-23	
A			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 27 February 2004	Examiner Glasser, J-M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.92 (P0-C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 2651

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 5 774 805 A (ZICKER ROBERT G) 30 June 1998 (1998-06-30)	12	
A	* claims 3,5,9; figure 6 * * column 3, line 14 - line 20 *	2,19,20	
X	----- NEGUS K J ET AL: "HOME RF TM AND SWAP: WIRELESS NETWORKING FOR THE CONNECTED HOME" MOBILE COMPUTING AND COMMUNICATIONS REVIEW, ACM, NEW YORK, NY, US, vol. 2, no. 4, 1 October 1998 (1998-10-01), pages 28-36, XP000786057 ISSN: 1091-1669	1-5,23, 25,27	
A	* figure 5 * * page 29, left-hand column, line 19 - line 35 * * page 30, left-hand column, line 2 - line 19 * * page 31, right-hand column, line 7 - line 26 *	2-4,17, 18,24,26	
Y	----- DE 195 20 253 A (DAIMLER BENZ AEROSPACE AG) 5 December 1996 (1996-12-05) * claim 1 * ----- -/--	10	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search Munich		Date of completion of the search 27 February 2004	Examiner Glasser, J-M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 2651

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	"IEEE standard Part 11: wireless LAN medium access control (MAC) and physical layer (PHY) specification. (ISO/IEC 8802-11, ANSI/IEEE Std 802.11-1999) Chapter 11: MAC sublayer management entity"	15,16	
A	ISO/IEC 8802-11 ANSI/IEEE STD 802.11, XX, XX, 20 August 1999 (1999-08-20), pages 123-137, XP002207975 * page 134; figures 67,68 * * page 134, line 4 - line 8 *	17,18, 24,26	
P,X	EP 1 119 137 A (LUCENT TECHNOLOGIES INC) 25 July 2001 (2001-07-25) * figures 2,5 * * page 9, line 1 - line 6 * * page 9, line 39 - line 40 *	14	
A	EP 0 930 766 A (SYMBOL TECHNOLOGIES INC) 21 July 1999 (1999-07-21) * figures 3,5,6D,12 *	2-4	
E	EP 1 199 842 A (SYMBOL TECHNOLOGIES INC) 24 April 2002 (2002-04-24) * claims 1-4 *	17,18	
Y	"Bluetooth Specification Version 1.0 B, Part B: Baseband, Chapters 1-4." CORE, [Online] 29 November 1999 (1999-11-29), pages 33-66, XP002271445 Retrieved from the Internet: URL:https://www.bluetooth.org/docman2/ViewCategory.php?group_id=53&category_id=213> [retrieved on 2003-10-14] * page 43, paragraph 2.2 - page 47, paragraph 3.3 *	19,20	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 27 February 2004	Examiner Glasser, J-M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 2651

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	"IEEE standard Part 11: wireless LAN medium access control (MAC) and physical layer (PHY) specification. (ISO/IEC 8802-11, ANSI/IEEE Std 802.11-1999) Chapter 9: MAC sublayer functional description"	19,20	
A	ISO/IEC 8802-11 ANSI/IEEE STD 802.11, XX, XX, 20 August 1999 (1999-08-20), pages 70-97, XP002207974 * paragraph [9.2.5.6] *	17,18, 24,26	
A	----- US 5 696 903 A (MAHANY RONALD L) 9 December 1997 (1997-12-09) * column 15, line 61 - column 16, line 26 * -----	19,20	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search Munich		Date of completion of the search 27 February 2004	Examiner Glasser, J-M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

Application Number

EP 01 12 2651

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):

☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.

☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.

☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:

☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number

EP 01 12 2651

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-8,21-27

The first invention claimed by independent claims 1, 7, 10-15, 17, 21, 23, 25, 27 relates to the problem of avoiding interference between two co-located air interfaces in a dual mode system WLAN/WPAN.

The solution is characterised by using a) coordinated transmission (a coordinator associated with the base station for, in turn, activating the first radio transceiver, deactivating the first radio transceiver, activating the second radio transceiver, and deactivating the second radio transceiver), b) antenna polarization, c) a frequency division multiplex scheme.

2. claims: 19,20

Independent Claim 19 deals with the problem of using a radio communication system based on a master-slave protocol in an environment prone to interferences.

In order to solve the problem, the second claimed invention makes use of operating said master unit during a first time period of each time slot to detect interfering signals at a frequency corresponding to the following time slot, and inhibiting transmission by said master transceiver during even time slots if interfering signals have been detected during either of the current or previous time slots.

Remark: The present claim 20 does not unambiguously define upon which claim it depends, thus leaving the scope of the claim unclear (see Rule 29(4) EPC and the EPO-Guidelines C-III, 3.6).

For the examination about unity, it is assumed that claim 20 is dependent upon claim 19 (Reason: See claim 37 of the priority document).

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 01 12 2651

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-02-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9929126	A	10-06-1999	AU 1500299 A	16-06-1999
			EP 1038409 A1	27-09-2000
			GB 2347321 A ,B	30-08-2000
			WO 9929126 A1	10-06-1999
US 5793757	A	11-08-1998	AU 1817297 A	02-09-1997
			BR 9707506 A	27-07-1999
			CA 2246432 A1	21-08-1997
			CN 1215514 A ,B	28-04-1999
			EP 0880831 A1	02-12-1998
			ID 15888 A	14-08-1997
			JP 2000504908 T	18-04-2000
			WO 9730526 A1	21-08-1997
US 5774805	A	30-06-1998	US 5887259 A	23-03-1999
			AU 717687 B2	30-03-2000
			AU 3376397 A	05-01-1998
			BR 9709531 A	11-01-2000
			CA 2255823 A1	11-12-1997
			CN 1221542 A	30-06-1999
			EP 0894411 A1	03-02-1999
			JP 2000511731 T	05-09-2000
			NO 985675 A	04-12-1998
			NZ 332883 A	28-01-2000
			WO 9747147 A1	11-12-1997
			AU 689215 B2	26-03-1998
			AU 1698995 A	11-09-1995
			AU 706261 B2	10-06-1999
			AU 7319598 A	27-08-1998
			BR 9506893 A	09-09-1997
			CA 2182586 A1	31-08-1995
			CA 2386741 A1	31-08-1995
			CA 2386746 A1	31-08-1995
			CA 2386753 A1	31-08-1995
			CN 1151237 A	04-06-1997
			EP 0746954 A1	11-12-1996
			JP 3210989 B2	25-09-2001
			JP 9509544 T	22-09-1997
			JP 2001016645 A	19-01-2001
			NZ 279750 A	19-12-1997
			NZ 329077 A	29-04-1999
			WO 9523488 A1	31-08-1995
			US 5703934 A	30-12-1997
			US 5862475 A	19-01-1999
			US 5794141 A	11-08-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 2651

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-02-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19520253	A	05-12-1996	DE 19520253 A1	05-12-1996
EP 1119137	A	25-07-2001	EP 1119137 A1	25-07-2001
			JP 2001217853 A	10-08-2001
			US 2001010689 A1	02-08-2001
EP 0930766	A	21-07-1999	US 6330244 B1	11-12-2001
			AU 750286 B2	11-07-2002
			AU 1211299 A	05-08-1999
			BR 9900222 A	13-06-2000
			CA 2256930 A1	16-07-1999
			CN 1237863 A	08-12-1999
			EP 0930766 A2	21-07-1999
			JP 11341532 A	10-12-1999
			TW 410515 B	01-11-2000
			US 2002034168 A1	21-03-2002
			ZA 9900280 A	07-07-2000
EP 1199842	A	24-04-2002	AU 6559301 A	02-05-2002
			BR 0105645 A	28-05-2002
			EP 1199842 A2	24-04-2002
			JP 2002319948 A	31-10-2002
			TW 532020 B	11-05-2003
			ZA 200106846 A	05-08-2002
US 5696903	A	09-12-1997	US 6714983 B1	30-03-2004
			AU 6987694 A	12-12-1994
			WO 9427382 A1	24-11-1994
			US 5657317 A	12-08-1997
			US 5790536 A	04-08-1998
			US 5949776 A	07-09-1999
			CA 2162722 A1	24-11-1994

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)